


# COMMUNICATIONS

\$1.00

INCLUDING "RADIO ENGINEERING" AND "TELEVISION ENGINEERING"

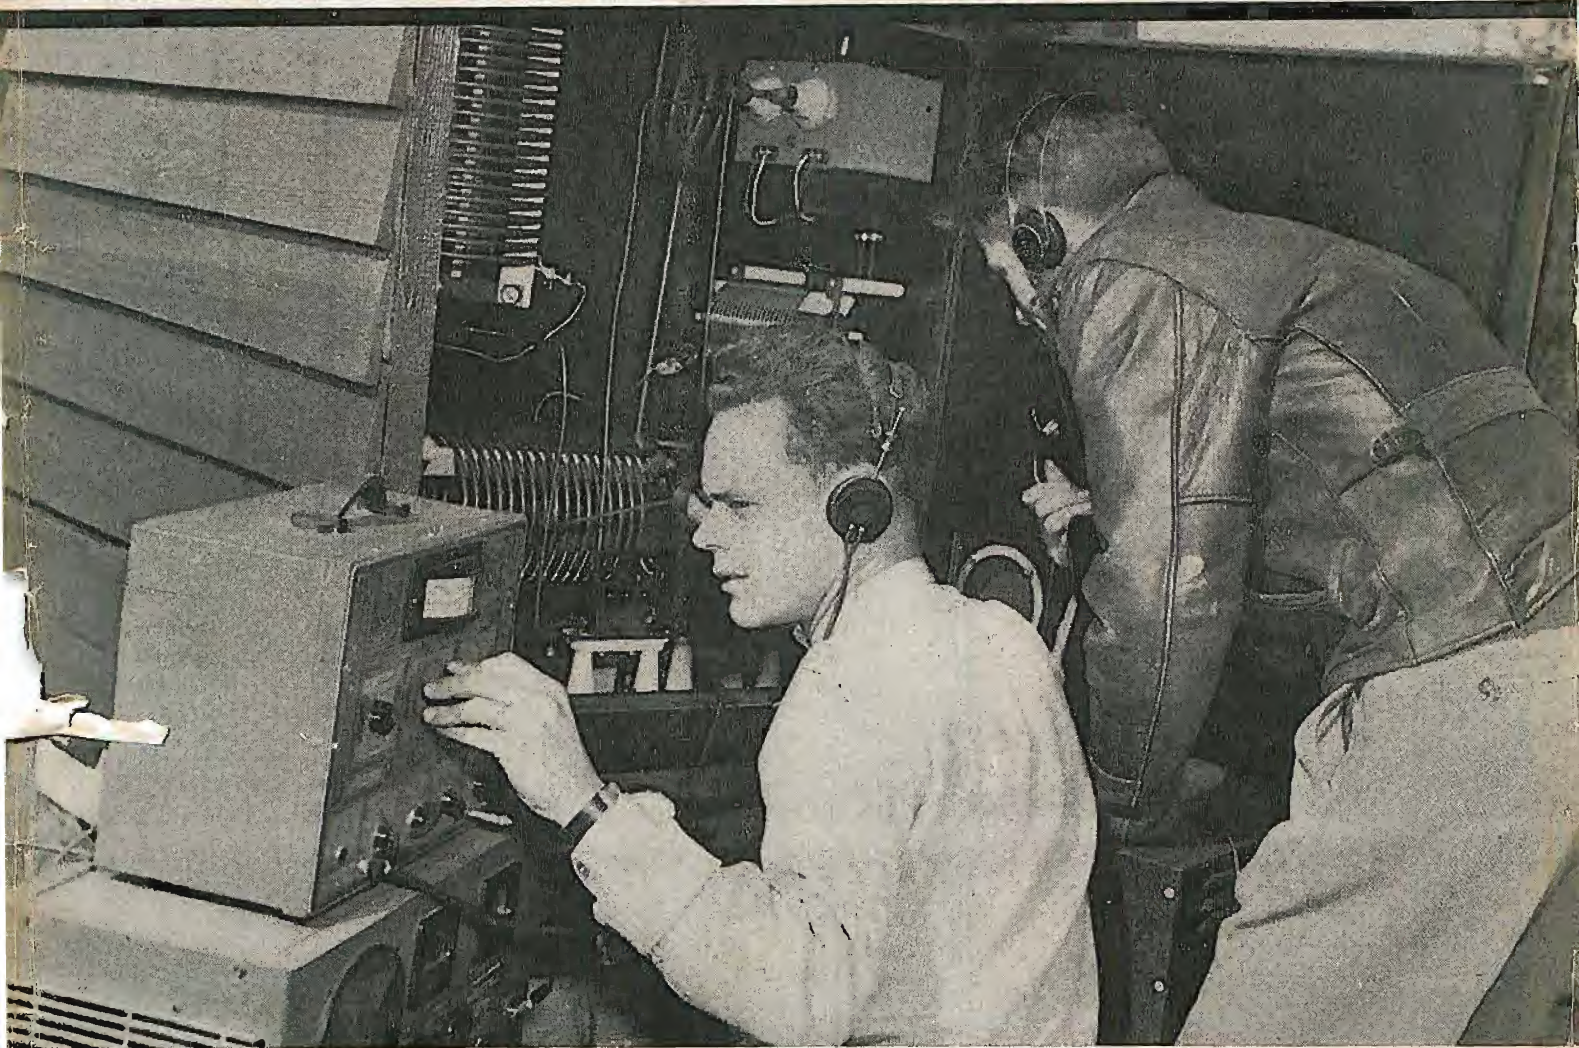

JANUARY

★ TV LENS FACTORS    ★ F-M/TV ANTENNA SYSTEMS  
★ H-F 20-KW TRANSMITTER WITH CONTINUOUSLY TUNABLE PLATE CIRCUIT

1948





### 3-Phase Regulation

MODEL	LOAD RANGE VOLT-AMPERES	*REGULATION ACCURACY
3P15,000	1500-15,000	0.5%
3P30,000	3000-30,000	0.5%
3P45,000	4500-45,000	0.5%

\* Harmonic Distortion on above models 3%.  
Lower capacities also available.



### Extra Heavy Loads

MODEL	LOAD RANGE VOLT-AMPERES	*REGULATION ACCURACY
5,000*	500 - 5,000	0.5%
10,000*	1000-10,000	0.5%
15,000*	1500-15,000	0.5%



### General Application

MODEL	LOAD RANGE VOLT-AMPERES	*REGULATION ACCURACY
150	25 - 150	0.5%
250	25 - 250	0.2%
500	50 - 500	0.5%
1000	100-1000	0.2%
2000	200-2000	0.2%



### 400-800 Cycle Line INVERTER AND GENERATOR REGULATORS FOR AIRCRAFT.

Single Phase and Three Phase

MODEL	LOAD RANGE VOLT-AMPERES	*REGULATION ACCURACY
D500	50 - 500	0.5%
D1200	120-1200	0.5%
3PD250	25 - 250	0.5%
3PD750	75 - 750	0.5%

Other capacities also available



### The NOBATRON Line

Output Voltage DC	Load Range Amps.
6 volts	15-40-100
12 "	15
28 "	10-30
48 "	15
125 "	5-10

\* Regulation Accuracy 0.25% from 1/4  
to full load.

# SORENSEN

## The First Line of standard electronic AC Voltage Regulators and Nobatrons

### GENERAL SPECIFICATIONS:

- \* Harmonic distortion max. 5% basic, 2% "S" models
- \* Input voltage range 95-125; 220-240 volts (-2 models)
- \* Output adjustable bet. 110-120; 220-240 (-2 models)
- \* Recovery time: 6 cycles;  $\pm$  (9 cycles)
- \* Input frequency range: 50 to 65 cycles
- \* Power factor range: down to 0.7 P.F.
- \* Ambient temperature range:  $-50^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$

All AC Regulators & Nobatrons may be used with no load.

\*Models available with increased regulation accuracy.

Special Models designed to meet your unusual applications.

Write for the new Sorensen catalog. It contains complete specifications on standard Voltage Regulators, Nobatrons, Increvolts, Transformers, DC Power Supplies, Saturable Core Reactors and Meter Calibrators.

**SORENSEN & CO., INC.**  
STAMFORD CONNECTICUT

Represented in all principal cities



DEFLECTION COIL  
SHELL CYLINDER




DEFLECTION  
COIL CORE



SHELL

DEFLECTION COIL  
TERMINAL RING

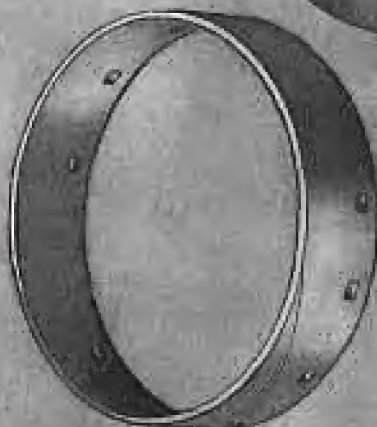

RETAINING RING



DEFLECTION  
SPACER



PUNCHING AND  
NOTCHING AS MAY BE  
DESIRED.

PUNCHED COSMALITE<sup>®</sup>  
COIL FORMS FOR..

# Television RECEIVERS

A new and further step in the ever increasing use of these spirally laminated paper base, Phenolic Tubes. Performance based upon approximately seven years of research.

\*

Other Cosmalite Types—

#96 COSMALITE for coil forms in all standard broadcast receiving sets.

SLF COSMALITE for Permeability Tuners.

\*

Spirally wound kraft and fish paper Coil Forms and Condenser Tubes.

\*

Attractive prices. Fast deliveries.

\*

Inquiries given specialized attention.

<sup>®</sup>Trade Mark Registered

*The* **CLEVELAND CONTAINER Co.**

6201 BARBERTON AVE. CLEVELAND 2, OHIO

- All-Fibre Cans - Combination Metal and Paper Cans
- Spirally Wound Tubes and Cores for all Purposes
- Plastic and Combination Paper and Plastic Items

PRODUCTION PLANTS also at Powers, Wis., Springfield, N. Y., Chicago, Ill., Detroit, Mich., Lansing, Mich.  
PLASTIC DIVISIONS at Powers, Mich., Springfield, N. Y. • ADHESIVE DIVISION at Cleveland, Ohio  
SALES OFFICES • Room 322, 1140 Broadway, N.Y.C. and 601 Main St., Hartford, Conn.  
IN CANADA • The Cleveland Container Canada Ltd., Toronto, Ontario



# COMMUNICATIONS

Including Television Engineering, Radio Engineering, Communication & Broadcast Engineering, The Broadcast Engineer, Registered U. S. Patent Office.

## LEWIS WINNER

Editor

## F. WALEN

Assistant Editor

Bryan S. Davis, President

Paul S. Weil, Vice Pres.-Gen. Mgr.

F. Walen, Secretary

A. Goebel, Circulation Manager

### Cleveland Representative:

James C. Hunt  
2225 Delaware Dr., Cleveland 8, Ohio  
Telephone: Erieview 1726

### Pacific Coast Representative:

Ernest A. Brand  
1052 W. Sixth St., Los Angeles 14, Calif.  
Telephone: Michigan 1732  
315 Montgomery St., San Francisco 4, Calif.  
Telephone: Douglas 4475

Wellington, New Zealand: Te Aro Book Depot.  
Melbourne, Australia: McGil's Agency.

Entered as second-class matter Oct. 1, 1937 at the Post Office at New York, N. Y., under the Act of March 3, 1879. Subscription price: \$2.00 per year in the United States of America and Canada; 35 cents per copy. \$3.00 per year in foreign countries; 35 cents per copy.

## COVER ILLUSTRATION

Raymond C. Watson, Jr., chief engineer of WOOS, Anniston, Alabama and David L. Stanley of the WOOS engineering staff, tuning up an antenna-coupling filter, designed by Andrew, to reject interfering frequencies from the 190' WHMA antenna tower, which is 560' away from the 150' WOOS tower.

## F-M BROADCASTING

The Cincinnati Times-Star F-M Station.....John B. Ledbetter 8  
*WCTS-FM, Sister Station of 5-Kw A-M WKRC, Now on Air with 101.9-Mc Transmitter with an Effective Radiated Power of 12.6-Kw.*

## H-F HIGH-POWER BROADCASTING

International Broadcast H-F Transmitter With Continuously Tunable Plate Tuning.....David A. Miller 10  
*Final Stage of 3.85 to 23.5-Mc Transmitter Continuously Tunable From Front Panel.*

## TELEVISION ENGINEERING

TV Lens Considerations For Image Orthicon Cameras.....Leonard A. Mantner 14  
*'Numerical' Evaluation of Factors Involved in Choice of Lens, Particularly for Image Orthicon Cameras.*

## F-M/TV ANTENNA ENGINEERING

F-M and TV Transmission Line Installation Problems.....J. S. Brown 20  
*Materials, Components and Accessories, and Methods Used in Installation of Coaxial Lines.*

## TELEVISION ANTENNA SYSTEMS

Cathode-Follower TV-Antenna System.....E. G. Hills 22  
*Antenna Array for 44 to 88 and 175 to 216-Mc Bands.*

## TRANSMITTING TUBES

Tube Engineering ..... 26  
*Design and Application Notes on 5 Kw Tv Tube, V-H-F Miniature Power Pentode and Image Orthicon for Studio Work.*

## A-M BROADCASTING

10-Kw A-M Installation in Puerto Rico..... 38  
*Pictorial Study of 740-Kc 10-Kw Installation Which Employs a 2-Tower Directive Antenna Array.*

## MONTHLY FEATURES

News and Views.....Lewis Winner 7  
Veteran Wireless Operators' Association News..... 18  
The Industry Offers..... 33  
News Briefs of the Month..... 35  
Advertising Index..... 40

Entire contents Copyright 1948, Bryan Davis Publishing Co., Inc.



Published monthly by Bryan Davis Publishing Co., Inc.  
52 Vanderbilt Avenue, New York 17, N. Y. Telephone Murray Hill 4-0170





# NOW!


A Revolutionary FM CHANNEL SAVER Circuit  
in a *New, Sensational*  
Radiophone Communication System

For operation in the  
30-44 megacycle band

by

# PHILCO

—the Leader

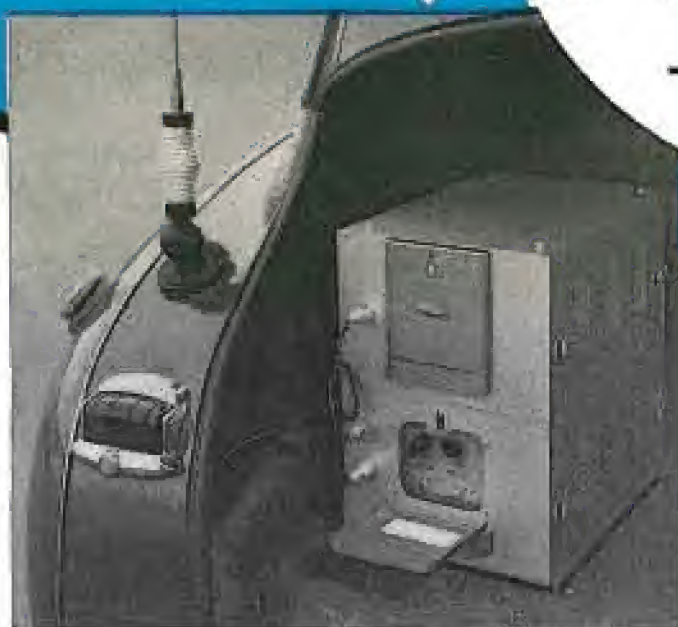

- Philco Radiophone Systems are Available for Operation on All Frequencies Assigned for Mobile Communication.
- Free Engineering Consultation Service.
- Nationwide Service Organization.

PHILCO announces a sensational new Radiophone Communication System that is revolutionary! PHILCO engineers have developed an amazing "Channel Saver" circuit that *doubles* the available channels in the 30-44 megacycle band... actually uses only half the present channel width, without loss of voice quality or efficiency.

The new PHILCO Radiophone Communication System brings you the most modern design, with miniature tubes and new type circuits... the only FM communications system that uses the sensational PHILCO FM detector!

And PHILCO maintains a nationwide service organization now operating in your community! Mail the coupon today for full details.

Dept. J-9, Industrial Division  
Philco Corporation  
C and Tioga Streets  
Philadelphia 34, Penna.

Gentlemen:

Please send me information about the new  
PHILCO FM Radiophone Communication  
System.

NAME \_\_\_\_\_

ADDRESS \_\_\_\_\_

CITY \_\_\_\_\_

# PHILCO

INDUSTRIAL DIVISION

PHILADELPHIA • PENNSYLVANIA





# How 19,000 companies up take-home pay *without* upping payrolls

Can you deduct \$18.75 from \$60.00 and get \$66.25? Yes. And the way you can do it is mighty important to your company—and to the nation!

You start with \$60, representing someone's weekly take-home pay. You deduct \$18.75 for the purchase of a U.S. Savings Bond. That leaves \$41.25. But \$41.25 isn't what the worker takes home. He takes home \$41.25 *plus* a \$25 Savings Bond. Total (assuming he holds the Bond till maturity): \$66.25.

## WHAT 19,000 COMPANIES HAVE LEARNED

In the 19,000 companies that are operating the Payroll Savings Plan for the regular purchase of Savings Bonds, employees have been more contented in their jobs—absenteeism has decreased—even accidents have been fewer!

Those are the "company" benefits the Plan provides, in addition to extra security for individual employees.

But the Plan has other, far-reaching benefits of basic importance to both your business and the national economy...

## SPREADING THE NATIONAL DEBT HELPS SECURE YOUR FUTURE

The future of your business is closely dependent upon the future economy of your country. To a major extent, that future depends upon management of the public debt. Distribution of the debt as widely as possible among the people of the nation will result in the greatest good for all.

How that works is clearly and briefly described in the free brochure shown at the right. Request your copy—today—from your State Director of the U. S. Treasury Department's Savings Bonds Division.

## ACTION BY TOP MANAGEMENT NEEDED

The benefits of regular Bond-buying are as important today as ever—but war-time emotional appeals are gone. Sponsorship of the Payroll Savings Plan by a responsible executive in your company is necessary to keep its benefits advertised to your employees.

Banks don't sell Savings Bonds on the "installment plan"—which is the way most workers prefer to buy them. Such workers want and need the *Payroll Savings Plan*.

Those are the reasons why it's important to make sure that the Plan is adequately maintained in your company.

The State Director will gladly give you any assistance you wish.

## "The National Debt and You,"

a 12-page pocket-size brochure, expresses the views of "Mr. Randolph Burgess, Vice Chairman of the Board of the National City Bank of New York—and of Clarence Francis, Chairman of the Board, General Foods Corporation. He sure in got your copy from the Treasury Department's State Director, Savings Bonds Division.



*The Treasury Department acknowledges with appreciation the publication of this message by*

# COMMUNICATIONS

*This is an official U. S. Treasury advertisement prepared under the auspices of the Treasury Department and the Advertising Council*





**PROFESSIONAL PERFORMANCE**—that keeps the original sound alive!

# *Ride 'em without Rumble!*



## **— on a turntable free of vibration**




The pounding of hooves may be sweet music to the ears of a race jockey. But to a disc jockey—whose program's success depends upon the undistorted high fidelity of his transcriptions—any extraneous mechanical noise leaves his listeners at the starting post. They just won't ride with him!

Fairchild engineers have succeeded in eliminating the last bit of extraneous mechanical noise—in the newly redesigned Unit 524 Transcription Turntable. Turntable noise, rumble and vibration are non-existent because of the unique method of mounting the drive—at the bottom of the cabinet... the use of a specially designed rubber coupling to connect the drive and synchronous motor which are spring-mounted and precision-aligned in a single heavy casting... the use of sound-stopping mechanical filters on the hollow drive shaft to reduce the transmission of vibration from the drive mechanism to the turntable... and the use of a heavy, webbed cast aluminum turntable mount at the top of the cabinet.

In addition to freedom from rumble, Fairchild offers you a wider frequency range and lower distortion content with its Unit 542 Lateral Dynamic Pickup, with a stylus mounting that allows the tip to follow the minute indentations engraved in the groove from 30 to 10,000 cycles and beyond, with a minimum of distortion. Want more details about sound equipment that really keeps the original sound alive? Address: 88-06 Van Wyck Boulevard, Jamaica 1, New York.



**Transcription Turntables**  
**Studio Recorders**  
**Magnetic Cutterheads**  
**Portable Recorders**  
**Lateral Dynamic Pickups**  
**Unitized Amplifiers**



SOUND EQUIPMENT



*Fairchild* CAMERA

AND INSTRUMENT CORPORATION





## 200 SERIES AUDIO OSCILLATORS

Available in six standard models, -hp- 200A and -hp- 200B have transformer-coupled output delivering 1 watt into matched load. Primarily designed for audio testing, -hp- 200C and -hp- 200D have resistance-coupled output and supply constant voltage over wide frequency range. The -hp- 202D is a modification of the 200D, extending frequency downward to 2 cps. -hp- 200I is a spread-scale oscillator designed for interpolation work and for applications where oscillation frequency must be known with utmost accuracy.



## 202B LOW FREQUENCY OSCILLATOR

Specially designed for work between  $\frac{1}{2}$  cps and 1000 cps. Provides excellent wave form, good stability, split-hair measuring accuracy in the very low frequencies. Ideal for vibration or stability checks on mechanical systems, for testing geophysical, electro-cardiograph or electro-encephalograph equipment, checking response of seismographs, or electrical simulation of mechanical phenomena.



## 201B AUDIO OSCILLATOR

Meets every requirement for speed, accuracy, wave form purity and ease of operation in FM and other fields where high fidelity is most important. Provides 3 watts output into a 600 ohm resistive load. Distortion held to 1% or less, at 3 watts,  $\frac{1}{2}\%$  at 1 watt output. Excels in testing high fidelity amplifiers, speakers, and in comparing frequencies.

# hp Resistance-Tuned Oscillators ...For Every Measuring Job $\frac{1}{2}$ cps to 10 mc!

From A to Z in measuring, there's an -hp- resistance-tuned oscillator engineered to fit your exact need. Nine precision oscillators in all...and each bears the famed -hp- family characteristics of no zero set, constant output, low distortion, great stability, and decade tuning. Brief data on these -hp- oscillators are given here. For complete details, write or wire today!

**HEWLETT-PACKARD COMPANY**  
15050 PAGE MILL ROAD • PALO ALTO, CALIFORNIA

## BRIEF SPECIFICATIONS

Instrument	Freq. Range	Output	Distortion	Freq. Response
-hp- 200A	25 cps to 35 kc	1 watt/72.5 $\Omega$	Less than 1%	$\pm 1$ db to 15 kc
-hp- 200B	50 cps to 20 kc	1 watt/72.5 $\Omega$	Less than 1%	$\pm 1$ db to 15 kc
-hp- 200C	20 cps to 100 kc	100 mw/10 $\Omega$	Less than 1% to 20 kc	$\pm 1$ db to 100 kc
-hp- 200D	2 cps to 70 kc	100 mw/10 $\Omega$	Less than 1% 10 cps to 20 kc	$\pm 1$ db throughout range
-hp- 202D	2 cps to 70 kc	100 mw/10 $\Omega$	Less than 1% 10 cps to 70 kc	$\pm 1$ db, 7 cps to 70 kc
-hp- 200I	4 cps to 6 kc	100 mw/10 $\Omega$	Less than 1% above 10 cps	$\pm 1$ db, 4 to 6000 cps
-hp- 202B	$\frac{1}{2}$ cps to 1000 cps	100 mw/10 $\Omega$	Less than 1% 1 to 1000 cps	$\pm 1$ db, 10 to 1000 cps
-hp- 201B	20 to 20,000 cps	3 w/42.5 $\Omega$	Less than 1%	$\pm 1$ db throughout range
-hp- 650A	10 cps to 10 mc	15 mw/50 $\Omega$	Less than 1% 100 cps to 100 kc	$\pm 1$ db throughout range



## 650A WIDE-BAND OSCILLATOR

Continuous frequency coverage, 10 cps to 10 mc. Highly stable, versatile. Output flat within 1 db throughout frequency range. Available voltages range from .00003 to 3 v. Other advantages include 94" scale length, 6 to 1 micro-controlled tuning drive, 50 db output attenuator variable in 10 db steps, output voltage divider providing 6 ohm internal impedance (reducing output voltage 100 to 1).

**hp laboratory instruments**  
FOR SPEED AND ACCURACY



# COMMUNICATIONS

LEWIS WINNER, Editor

JANUARY, 1948

## Going Up

A STRIKING INCREASE in operators and stations was revealed in the year-end report of the FCC. As of January 1, 1948, there were 3,834 broadcast stations which included 1962 a-m, 1,010 f-m, 73 tv and 590 remote pickups. Over 120,000 non-broadcasting systems were recorded, including 20,818 aeronautical, 14,254 marine, and over 7,000 public safety and land transportation systems. Over 350,000 licenses were issued to radio operators.

In analyzing the license grants, the FCC reported that 1,522 a-m stations have been licensed to operate, 374 f-m stations are on the air and 17 television stations are now operating. It was reported that a total of 4,130 license authorizations were granted for police, fire and forest protection. And power, transit and petroleum pipe-line facilities received license grants for 1,136 stations. The railroads received 109 licenses and were authorized to operate over 900 transmitters.

Two-way transmitting systems were installed in over 25,000 trucks, buses and taxicabs. Over 30,000 received special licenses to use two-way systems in such activities as lumbering, paper mills, highway activities, ranch services, etc.

In 1948 a 50% increase in station and operator grants is anticipated.

## New Broadcast Definitions

STREAMLINED DEFINITIONS of many broadcast terms were adopted at the recent Meeting of Engineers held in Havana, Cuba, during the latter part of 1947.

The definitions approved included *skywave signal*, which was defined as a radiated signal which is reflected back from the ionosphere. A *ground-wave signal* was defined as the radiated signal which is propagated close to the surface of the earth and is not reflected back from the ionosphere. Another definition stated that by a 10% (or 50%) skywave field intensity is meant that level of field intensity exceeded by the hourly median field intensities, in some specified interval of calendar time for 10% (or 50%) of the nights of that calendar interval. The hour of

the night to which the *hourly median* refers is the hour centered on the instant of time two hours after the latest sunset on the transmission path. Also defined was *frequency tolerance and stability* with the operating frequency of each broadcast station being maintained to within 20 cycles per second of assigned frequency and not varying perceptibly over short periods of time under all conditions of operation. Defining *determination of power*, the engineers stated that power should be determined by taking the product of the square of the current at the point of input to the antenna system and the total resistance at that point.

Provision for the inclusion of the 540-kc band, raising the total channels to 107, was also suggested at the conference. The use of this channel for clear, regional or local purposes will be discussed at the forthcoming Third North American Regional Broadcasting Conference in Canada during August.

## On The Development Front

SIMPLIFIED TV RECEIVER designs, featuring 7" electrostatic picture tubes, will soon appear in many models. Circuits will have each of the i-f stages tuned to the same frequency. To achieve broadband response degeneration at r-f will be employed. The use of negative feedback has been found very effective since its behavior is relatively less dependent on the changes in tube characteristics.

Some of the receivers will feature selenium rectifiers in doubler and quadrupler systems. Filaments will be connected up in series, obviating the need for a filament transformer. The only iron core component that will appear in many of these models will be the output transformer to the speaker and filter choke.

## The IRE National Convention

THE YEAR'S ENGINEERING EVENT, the IRE National Convention, will feature presentation of over 100 outstanding papers on all phases of broadcasting, commercial communications and industrial electronics. Presented at the Hotel Commodore and Grand Central Palace, March 22nd to 25th, there'll

be discussions on f-m, navigation aids, antennas, amplifiers, circuit designs, tube manufacturing, design and engineering, superregeneration, transmission, nuclear studies, components and supersonics, television, measurements, broadcasting and recording, propagation, microwaves and receivers.

Among the f-m papers will be one on an f-m detector tube with instantaneous limiting and single-circuit discriminator, by Robert Adler of Zenith.

Five papers have been scheduled on superregeneration, including a discussion of the linear mode by Herbert A. Glucksman, Watson Labs., and external and internal characteristics of separately quenched superregenerative circuits by Sze-Hou Chang, Watson Labs.

In a session on systems, Donald E. Norgaard, G.E., will analyze the important subject of selective sideband transmission and reception.

Complete details on the program will appear in the February issue.

## Definition of An Engineer

FRED SMITH, writer of many COMMUNICATIONS papers, has submitted an interesting bit of comment on the engineer and information.

He says: "A good engineer is often defined as one who may not have remembered every technical detail connected with this work, but who can locate that information quickly when it is required.

"Obviously, it is impossible for everyone to be intimately acquainted with the multitude of innovations and new techniques which appear in all phases of communications. The mountain of journals, bulletins, periodicals and new books which crowd many desks gives mute testimony to the enormity of the task.

"There is, however, a lever by which the engineer can move this mountain of information. That lever is simply a suitable filing system, a master index of the technical data on hand. The idea may sound rather pedantic, but time saved by a good reference system has a dollars and cents value that should appeal to the most practical man."

Sound advice!—L. W.



# The Cincinnati Times-Star F-M Station



Above

Antenna at WCTS-FM. A four-section pylon with a gain of four is mounted atop a 446' Blaw-Knox grounded tower providing an effective radiating power of 12.6 kw. Matching stubs are at base, permitting tuning adjustments at ground.

Below

A view of the 3-kw 1-m transmitter and associated equipment.



WCTS-FM, Sister Station of 5-Kw A-M WKRC, Now on the Air with a 101.9-Mc F-M Transmitter, with an Effective Radiated Power of 12.6 Kw.

by JOHN B. LEDBETTER

Engineer  
WKRC, WCTS-FM

F-M INSTALLATIONS, postponed and delayed in many areas because of reconversion difficulties, parts and material shortages, and strikes in many major industries, have, nevertheless, increased at a striking pace. From 66 stations on the air in January, 1947, f-m has grown until at this writing nearly 300 f-m stations are on the air, some 63 fully licensed and the remainder on interim operation. There are 696 more who have received construction permits, while 897 hold conditional grants, and at least 128 are in the process of requesting FCC approval. When these stations have been added to the number already in operation, the ranks of f-m broadcasters will have swelled to nearly 1,800.

## The WCTS-FM Station

After the usual construction difficulties and delays in delivery of equipment, we went on the air on March 17, 1947, with a 3-kw transmitter and an interim power of 6.2 kw on 96.9 mc. On October 15, we shifted to our new

frequency of 101.9 mc. This shift was part of FCC's reallocation plan. Because of tower and transmission-line installation problems, it was necessary to postpone use of a four-section pylon, until a week after the shift to our new frequency.

## The Antenna System

The antenna, located on an adjacent hill (one of the highest points in Cincinnati), some 75' above the studio-transmitter location, was mounted atop a 446' grounded tower, making a total height of slightly over 500'. This antenna, with a gain of slightly over four, increased the effective radiation power from 6.2 to 12.6 kw.

The interim antenna was an 84' three-bay turnstile. This turnstile, designed and constructed by Hugh LaCrosse, WKRC transmitter engineer, had given a good account of itself during the interim period. One feature, developed by LaCrosse, allowed the matching stubs to be brought to the bottom of the pole instead of being



Above

Reinforced steel cables run from the transmitter to the top of the hill, to which are lashed the transmission line. Transmission line is at left. Conduit at right carries a-c power to eight antenna clearance lights and two 1,000-watt tower beacons.



terminated at the top, so that all tuning adjustments could be made from the ground.

In our transmission-line setup (3½" concentric copper lead) it was decided to insert four offset 35° couplers in the line to permit running of the line up the hill from the transmitter to tower leg. To permit this installation, two specially-reinforced steel cables were run from the transmitter to the top of the hill and the transmission line lashed to these cables.

### Transmitter-Studio Building

The transmitter building<sup>8</sup>, housing complete radio facilities, was designed by George A. Wilson, chief engineer of WKRC and WCTS. Landscaping transformed the station site from a barren, desolate rock pile to a site of beauty.

Due to delays in receiving insulating and other materials the studio has not been completed. It was felt that greater public service would be attained if maximum efforts were expended toward getting the station on the air with its power first, then attending to studio and shop matters as soon as materials arrived.


In the announcer's booth which presently occupies part of the regular studio space are an announcer's clock, monitor speaker and microphone.<sup>9</sup> A two-watt neon bulb placed just below eye level is used for an open mike signal.

### Control Room


The control room is equipped with two turntables,<sup>10</sup> console,<sup>11</sup> an audition and monitor cue speaker,<sup>12</sup> a Naval Observatory split-second clock, and a second speaker<sup>13</sup> for air cue. In the console, the 1 and 2 positions are used for microphone channels; positions 3 and 4 are normalised to the two turntables but may be patched out to microphone positions if so desired. The regular attenuators<sup>14</sup> in the 3 and 4 positions have been removed and special attenuators<sup>15</sup> installed.

With these new attenuators, the audition amplifier is automatically

(Continued on page 36)

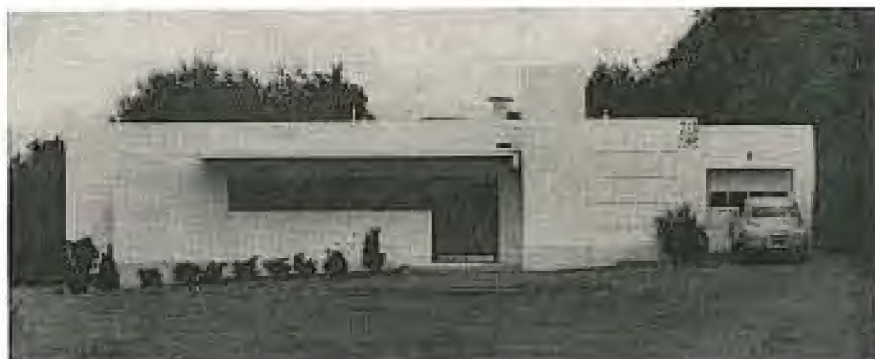

Above  
Front view of the WCTS-FM building, which is situated on a high hill at 1932 Highland Avenue, Cincinnati, Ohio.

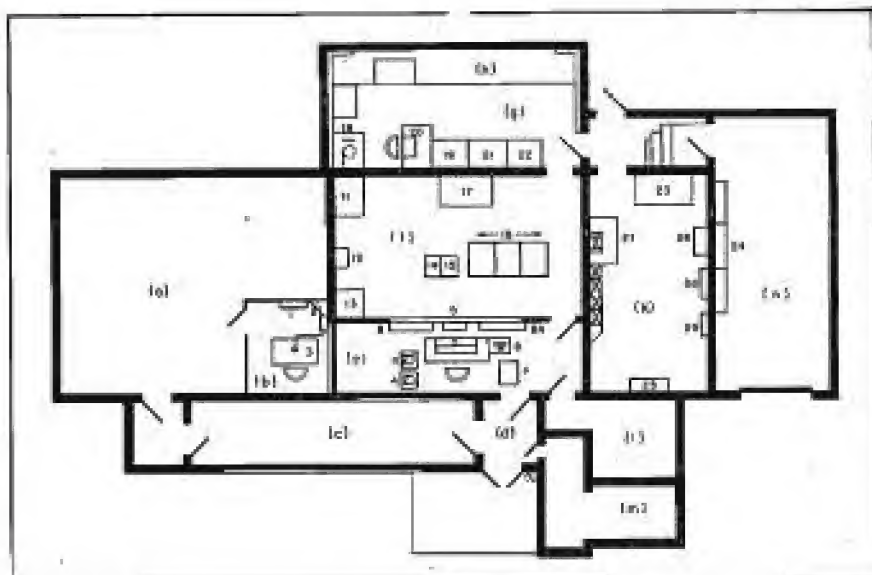

Above  
Floor plan of the 1-m station of the Cincinnati Times Star. Space (a) is for a proposed 25' x 21' studio; (b) is the announcer's booth; (c) outer vestibule; (d) entrance; (e) control room; (f) turntables; (g) console; (h) combination file cabinet and typewriter desk, which contains transmitter and audio equipment diagrams, etc.; (i) portable program-record cabinet; (j) audition and monitor cueing speaker; (k) second speaker for air cueing, and (l) Naval Observatory split second clock; (m) transmitter room (11 and 12 are spare-part storage cabinets, 11 being used for receiving tubes, turntables, overdrive assemblies, attenuators, capacitors and resistors, and 12 being used for spare transmitter tubes and transformers, power resistors, etc.); (n) power supply for console; (o) equipment rack which contains part of audio equipment; (p) second audio rack; (q) 3-kw air-cooled transmitter assembly which consists of the power-supply cabinet and control unit, oscillator-modulator and frequency-control unit, and doubler-driver and final-amplifier unit; (r) portable test equipment dolly which contains a tube tester, vvm, scope, tools, supplies, etc.; (s) is the program department and record library. Item 13 is a dual-speed high-fidelity playback unit and 15, 17, 18, 19 and 20 are record and transcription files. At 21 is the program director's desk. In space (k) we have an equipped workbench for construction work and emergency repair. Telephone and line terminations are housed in room (k) with a-c circuit breakers and main boxes at 25; refrigerated air conditioner is at 26 and wash rooms are at 27. The section (a) is the garage.



Right  
Turntable and console used at the station.

<sup>8</sup>RCA BTF-3 B.  
<sup>9</sup>RCA type HF-14.  
<sup>10</sup>Blue-Knox.  
<sup>11</sup>Built by Ferro-Concrete Co., Cincinnati.  
<sup>12</sup>RCA 77-D.  
<sup>13</sup>RCA 70-C2.  
<sup>14</sup>RCA 76-B2.  
<sup>15</sup>Altec-Lansing 600.  
<sup>16</sup>Daven RC-102-3.  
<sup>17</sup>Daven RCQ-102-5.



# International Broadcast H-F Transmitter With Continuously Tunable Plate System

**Tuned Circuit of Final Stage of 2.85 to 22.5-Mc Transmitter Is Continuously Tunable from Front Panel. Power Output Is 20-Kw, Carrier, for Telegraph Service and 15-Kw, Carrier, for Phone.**

by **DAVID A. MILLER**

Assistant Chief Engineer  
J. H. Bunnell and Company

EASE OF TUNING, one of the most important design considerations, is a particularly vital factor in high-power h-f wide-range transmitter construction, where a minimum of controls and flexibility of operation are extremely advantageous.

With this type of tuning flexibility as a feature consideration, the 20-kw h-f transmitter, shown in Figure 1, was developed, with a plate circuit which is continuously tunable from the front panel over a 2.85 to 22.5-mc range.

The plate tuning circuit is an integral assembly composed of the tube water jacket, tuning coil, tuning ca-

pacitor, output coupling coil, bypass and neutralizing capacitors.

## Power-Amplifier Circuit

Coupling, shown fixed in Figure 2, at the power-amplifier grid end, can be varied at the exciter end by a control located on the front panel. Both fixed and grid leak bias are employed. The grid tank, balanced with respect to ground in order to obtain the neutralizing voltage, is tuned by varying the inductance. The variable inductors and capacitors in the antenna tuning circuit are used to load, balance and impedance-match the output of the transmitter to the antenna. A pi-section plate supply filter is used.

The plate tuning capacitor varies from 100 to 370 mmfd, the plate tuning inductance from 12 to 0.5  $\mu$ h, and the

loaded  $Q$  of the circuit from 10 to 20.

## The Inductances

The plate-tuning coil, which is water cooled, is composed of ten and one-quarter turns of  $\frac{3}{8}$ " copper tubing. Of the total turns, eight and one-quarter turns are spaced  $1\frac{1}{2}$ " between centers, one turn is spaced  $1\frac{3}{8}$ " apart and one turn  $2\frac{3}{8}$ " apart. The closely spaced turns are located at the bottom of the coil and the spacing increases towards the top. The inlet and outlet unions make watertight connections and also make it easy to remove this coil for cleaning, repairs or replacement.

The output coupling coil, with an inductance of 1  $\mu$ h, is composed of two turns of the same tubing. This coil requires no cooling other than the forced air used to ventilate the entire power amplifier frame. Both plate-tuning coil and output-coupling coil are silver plated.

How these coils are coupled, supported and insulated from each other is shown in Figures 3, 4 and 5. This assembly presented quite a few problems. The support of the coils had to be rigid, strong and capable of holding its spacing under all operating conditions. The proper operation of the shorting spider required that the plate inductance be centered very accurately. Since peak voltage of about 40,000 volts would be encountered in operation, it was necessary in the design to prevent corona, dielectric breakdown, and voltage arc-overs across the surface of the insulation.

For insulation we selected glass-bonded mica, which is strong, machinable, and has excellent insulation characteristics. To achieve rigidity and fixed spacing between turns four grooved bars were made up to hold the plate-tuning coil between them. These bars are supported by four more bars that are securely fastened to the frame at both ends. The output-coupling coil is mounted upon this set of bars and, with the tuning coil and its supports, forms two concentric cylinders. The

J. H. Bunnell model 26-15.

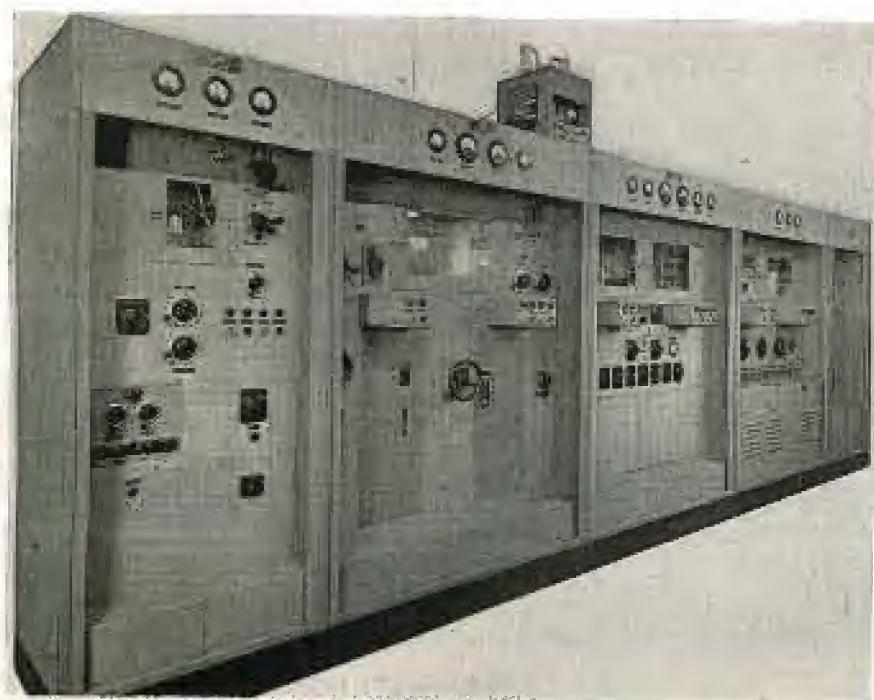


Figure 1  
Continuously tunable 2.85 to 22.5-mc transmitter.



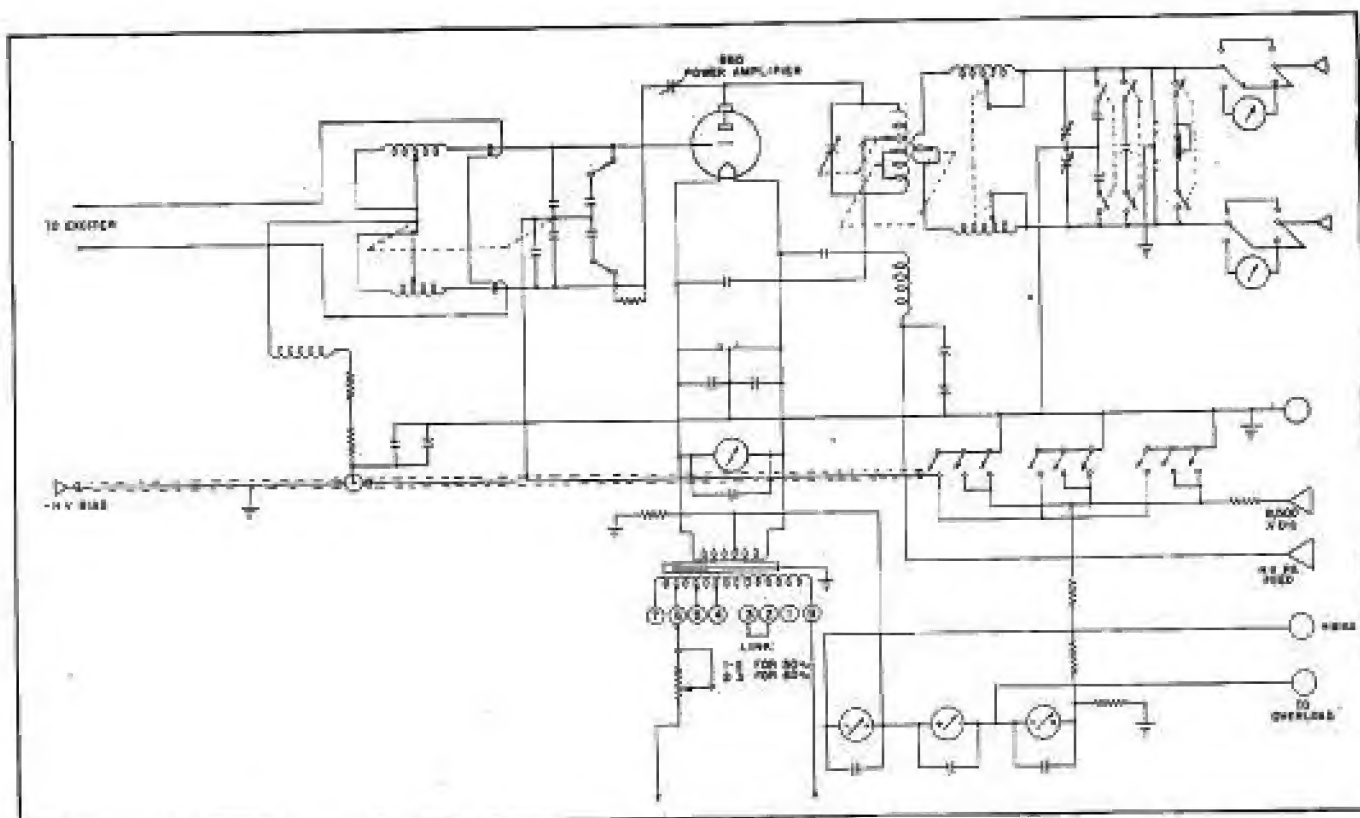


Figure 2  
Schematic of the power amplifier. The grid circuit is shown linked coupled to the exciter. Although coupling is shown fixed at the p-a grid and it can be varied at the exciter end by a control located on the front panel.

space between the coils is two inches and is controlled by the spacers placed between the two sets of supports. Every section of this assembly can be adjusted to compensate for any differences in parts due to normal production tolerances. Because of this feature, precision settings can be attained with low cost parts. To facilitate replacement, every glass-bonded mica part has an identifying letter and number engraved upon it.

Voltage arc-overs across the surface of the insulation, commonly called *creepage*, presented many construction problems. A conservative *creepage factor* of 5,000 volts per inch was adopted in design to permit operation in service conditions where the ambient

humidity might be 95%. The grooved glass-bonded mica bars fulfill this requirement by increasing the surface distance between adjacent turns, between coils and between either coil and the frame.

#### Water Jacket

The water jacket and its glass-bonded mica supports fit on top of the frame that houses the plate circuit as-

Figure 3  
Front view of the plate-tuning system.

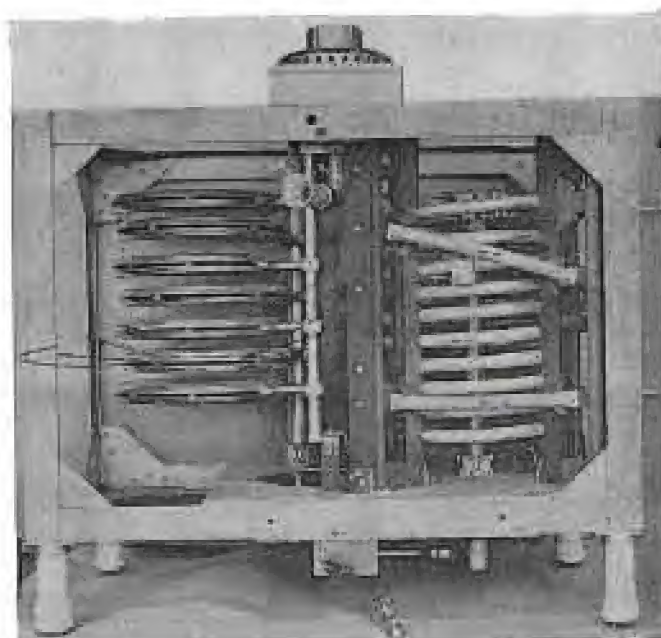
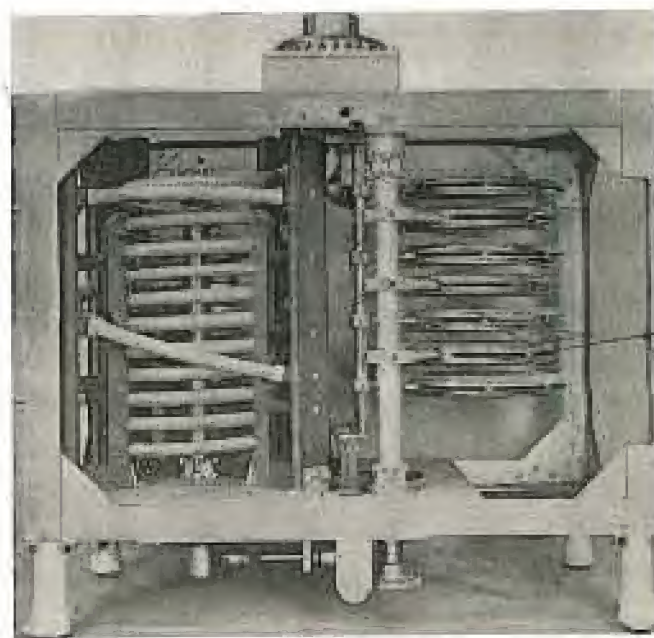


Figure 4  
Rear view of the plate tuning system. Incidentally, in both these views the equipment is shown ready for shipment, with the plate coil braced by cord.





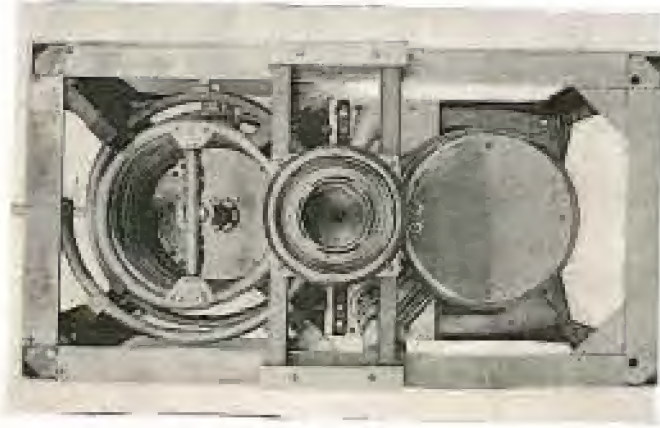


Figure 7  
The output coupling coil.

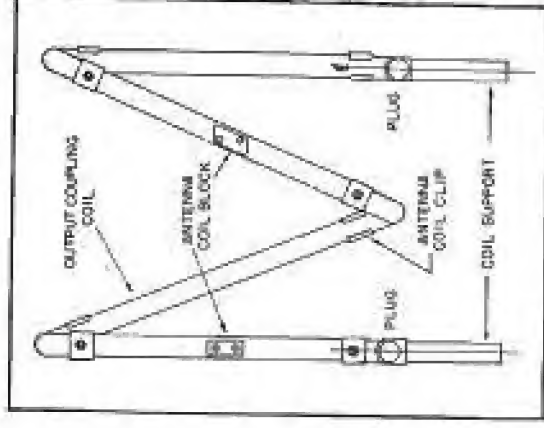


Figure 6  
The water-cooled plate tuning coil.

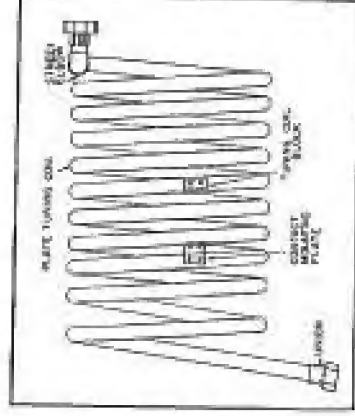


Figure 5  
Top view of the plate tuning coil.


assembly. The union soldered to the inlet pipe of the water jacket provides a removable connection to the plate-tuning coil. The outlet also has a combined union and corona shield which connects it to a Saran pipe which acts as the insulation for the return side of the water system.

#### The Shorting Spider

The plate-tuning coil shorting spider is shown in Figures 5 and 8. This

spider acts as a screw with the spider as a single external thread and the plate-tuning coil as the internal thread. When the large shaft in the center is rotated, the spider climbs up or down the plate-tuning coil, depending upon the direction of the rotation. The shaft, which acts as part of the coil shorting circuit, is raised or lowered by the spider so that it will never be in the unshorted or used portion of the plate-tuning coil.


Figure 8  
The plate tuning coil shorting spider. The spider arms can change their angle to adapt themselves to the changes in spacing or pitch of the plate-tuning coil.

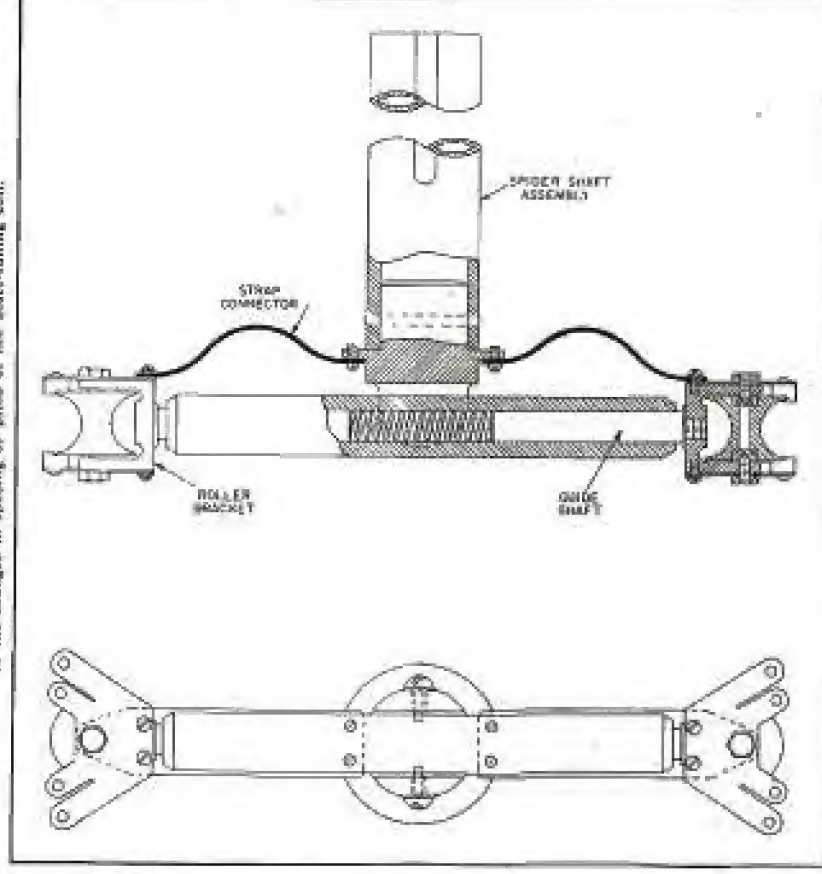

#### Spring Contact Assembly

The spring contact assembly has solid silver contacts which make the electrical contact with both the bottom and top surfaces of each turn of the coil. The body of this contact assembly conducts the current around the moving parts of the roller assembly. The strap connectors carry this current around the moving parts of the arm assembly to the center shaft. At the bottom of the shaft is a spring assembly, whose silver contacts conduct the current around the moving parts of the shaft drive and into the frame. By providing these alternate paths for the tank current around the moving parts of the assembly, power losses were reduced to a minimum, sources of heat were prevented, and high efficiency and cool operation were obtained.



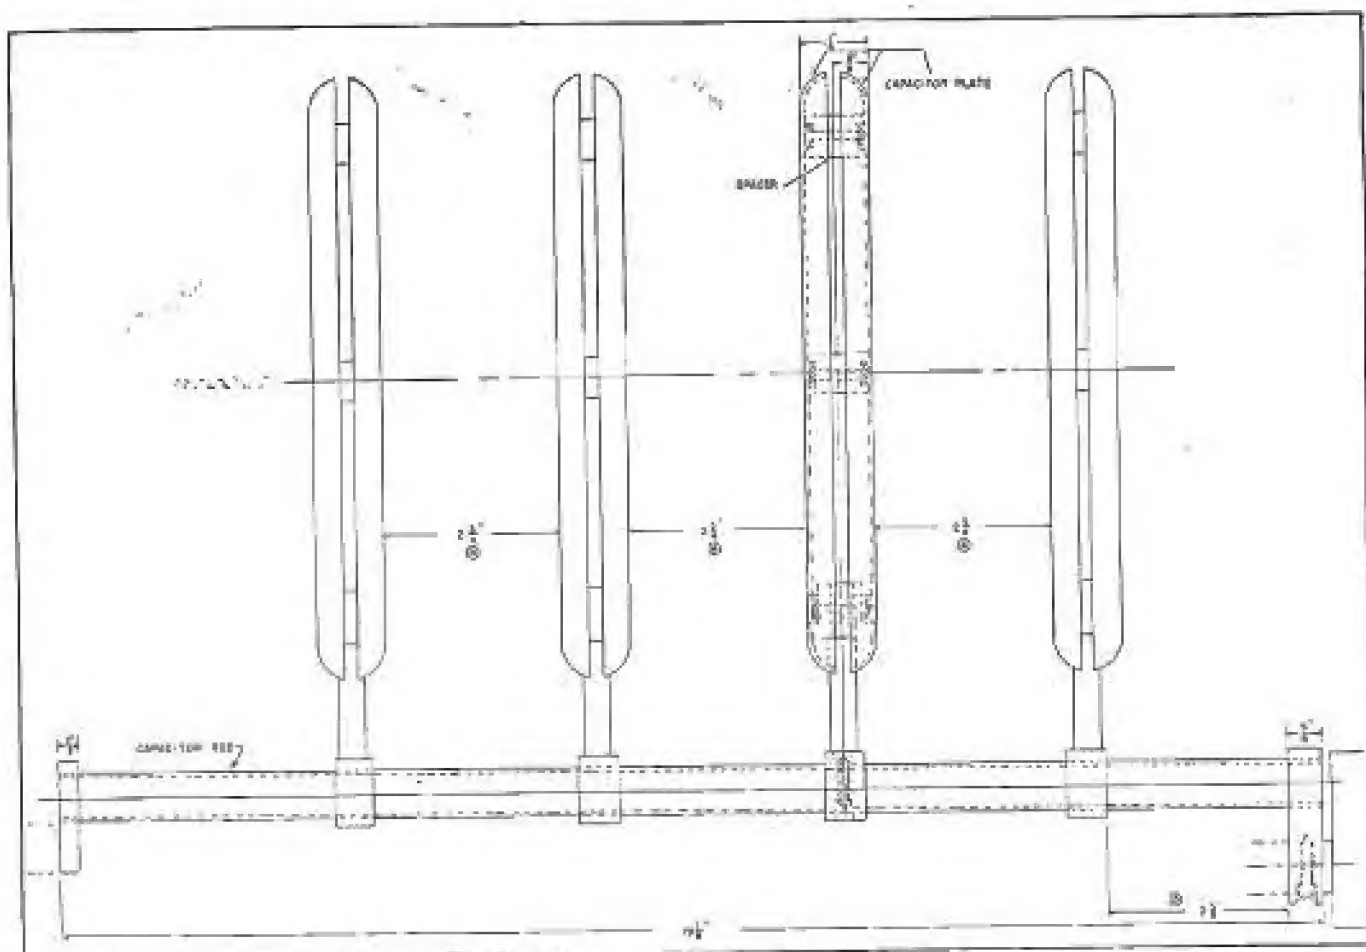

### The Tuning Capacitor



The variable plate-tuning capacitor shown in Figures 3, 4 and 5, and the plate-tuning coil form the plate tank circuit. The stator assembly, shown in Figure 9, is composed of four plates clamped to a silver plated brass support rod. The clamps make the adjustment of the plates or their removal a simple matter. Each plate is composed of two spun aluminum disks placed back to back with aluminum spacers between them. The whole assembly is fastened to the water jacket

**Figure 9**  
Stator assembly of the variable plate-tuning capacitor which is composed of four plates clamped to a silver-plated brass-supported rod. Distance at A set at assembly of plate-circuit frame.

at the top end and to a horizontal glass-bonded mica bar at the bottom. The rotor assembly has three identical plates fastened in the same manner. This assembly is rotated by a gear drive fastened to a silver-plated brass.

(Continued on page 28)

**Figure 9a**  
How the insulating coupling connects to the front panel dial and control is shown in this drawing.

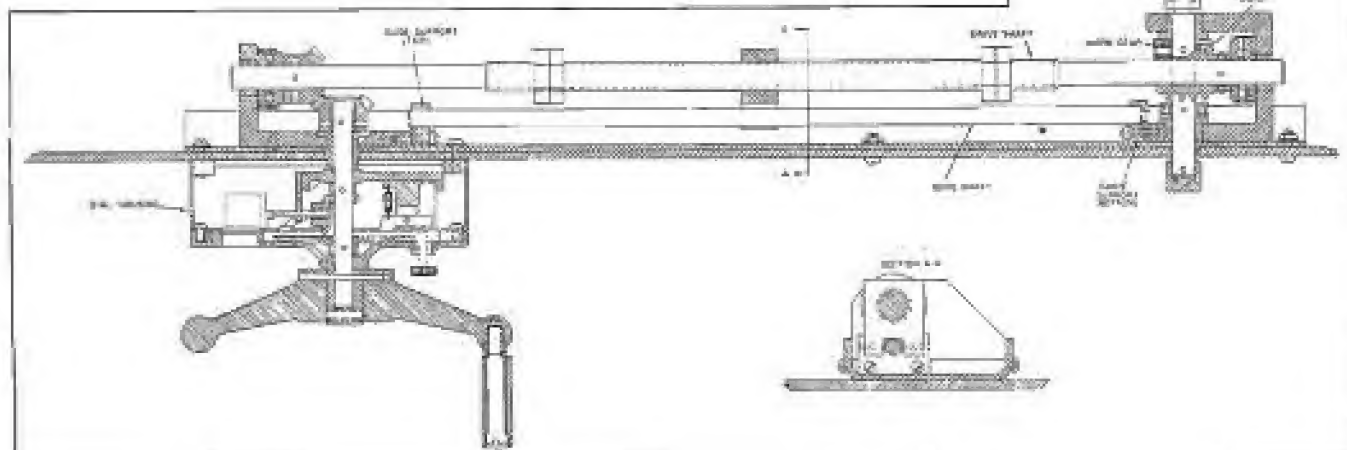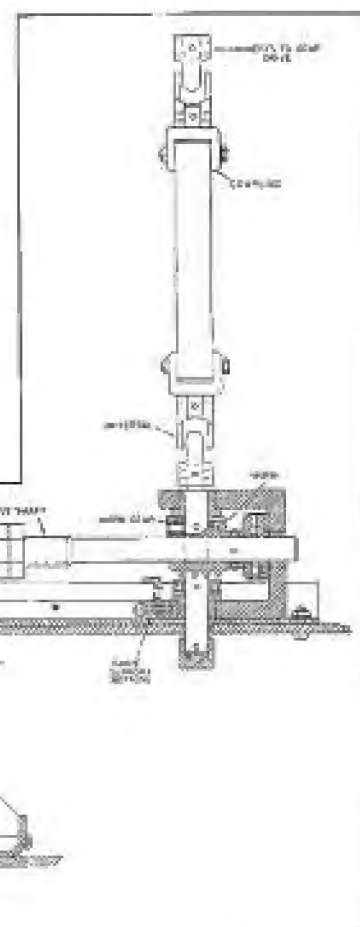



# TV Lens Considerations For Image Orthicon Cameras

THE CHOICE OF LENSES to be used with a tv camera involves factors which are of interest to several types of workers in the field of television. The camera designer is interested since he must know the level of illumination on the sensitive portion of the pickup tube, the necessary motion of the lens relative to the tube for focussing purposes, and the image magnification in terms of the resolution of the system. The producer is concerned with the angular field of view of a given lens from a particular operating position; such information being necessary to plan an adequate coverage of the event to be televised. Finally, the matter naturally is of importance to the television cameraman who needs to evaluate the foregoing factors in addition to judging the depth of field allowable in a given shot.

In general, the choice of lenses for an image orthicon camera is very similar to that used for standard 35-mm motion picture cameras.<sup>1</sup> A large newsreel group has used an assortment of six lenses, ranging from 1" to 12" focal length. However, the chief utility was apparently gained from a 1" lens used for wide angle shots, a 2" all-purpose lens, a 6" semi-telephoto, and a 12" sports telephoto; the latter two providing increased magnification with a smaller field of view. The photosensitive surface of the image orthicon is roughly only  $\frac{1}{16}$ " from the front surface of the tube, so that it is possible to use exceptionally short focal length lenses for wide angle coverage.

Experience at our labs has shown that a usual complement for field operations consists of a 50-mm lens (approximately 2") for general purpose and fairly wide angle coverage; a 135-mm lens (approximately  $5\frac{3}{4}$ ") for semi-telephoto coverage; and a 20" lens for narrow angle coverage with very large magnification of the scene.

The image orthicon pickup tube offers a variety of television pickups since it readily accommodates such a wide variety of lenses. By contrast, the iconoscope can never be used with

by **LEONARD MAUTNER**

Manager, Manufacturing and Engineering  
Television Transmitter Equipment Division  
Allen B. DuMont Laboratories, Inc.

less than an approximately 5" to 6" focal length because of its construction; consequently, its angular coverage has always been more restricted than that required by producers. In addition, of course, the high sensitivity of the image orthicon permits relatively smaller apertures to be used with the lenses, so that the depth of field gives

tremendous flexibility of coverage for the cameraman.

## Basic Design Formulas

In determining the lens choice, basic optical principles must, of course, be considered. To facilitate this analysis, the following basic design equations<sup>2</sup> relating these factors are offered.

(A) For illumination on the photocathode we have

$$E_{pc} = \frac{LT}{4\rho^2} \cos^4 \theta \quad (1)$$

Where:  $E_{pc}$  = photocathode illumination in lumens/sq foot

$L$  = scene luminosity in lumens per sq foot

$T$  = transmission factor of lens

$f$  =  $f/\#$  number of lens

$\theta$  = angle between optical axis and off-axis ray

(B) The  $f/\#$  number of a lens is defined in general as

$$f/\# = \frac{F}{2\rho} = \frac{F}{d} \quad (2)$$

Where:  $F$  = focal length

$\rho$  = radius of entrance pupil

$d$  = diameter of entrance pupil

The entrance pupil is the image of the actual limiting stop (aperture) of the lens system preceded by all the component lenses preceding it. In actual practice, if the iris is wide open (minimum  $f/\#$  number) then the value of  $d$  is often approximately equal to the diameter of the lens itself. For this case

$$f_{min} = \frac{F}{D} \quad (3)$$

Where:  $D$  = lens diameter  
and  $F$  = focal length of lens

(C) The horizontal field of view at infinity focus can be found from the relation

$$\phi_h = 2 \tan^{-1} \frac{X}{2F} \quad (4)$$

<sup>2</sup>These formulas given may be readily applied to all types of pickup tubes.

## Summary of Terms Used in Paper

$E_{pc}$  = Photocathode illumination in lumens/foot<sup>2</sup>

$L$  = Scene luminosity in lumens/foot<sup>2</sup>

$T$  = Overall transmission factor of lens

$f$  =  $f/\#$  number of lens

$F$  = Focal length of lens

$\theta$  = Angle between optical axis and off-axis ray

$\rho$  = Radius of entrance pupil

$d$  = Diameter of entrance pupil =  $2\rho$

$D$  = Physical diameter of lens

$\phi_h$  = Horizontal angular field of view

$\phi_v$  = Vertical angular field of view

$X$  = Width of active portion of photocathode

$Y$  = Height of active portion of photocathode

$p_o$  = Distance from object to lens for optimum focus

$p_t$  = Minimum distance from object to lens for tolerable focus

$p_r$  = Maximum distance from object to lens for tolerable focus

$\delta$  = Diameter of tolerable circle of confusion

$H$  = Hyperfocal distance

$S$  = Object distance to first principal plane

$S'$  = Image distance to second principal plane

$n$  = Multiple of  $F$  for object distance

$k$  = Multiple of  $H$  for object distance

$R$  = Racking distance of lens

<sup>1</sup>Popular commercial lens is Kodak Ektar type as used with the Ektra camera.



Where:  $\phi_v$  = horizontal angular field of view

$X$  = width of photocathode

$F$  = focal length of lens

If the vertical field of view is desired,  $X$  should be replaced by  $Y$ , the height of the photocathode.

(D) Depth of field is the variation in object distance within which adequate focus is obtained, the camera being focused for a given distance.

It can be defined in two ways:

(1) As a near and far variation about the optimum object distance, or

(2) As a near and far distance measured from the camera lens.

For this case, the latter definition will be used because it results in somewhat simpler mathematics. The equation can be written as

If  $p_o$  = optimum object distance

Then  $p_n$ , the near distance is

$$p_n = \frac{\frac{F d}{s}}{\frac{F d}{s} + 1} \quad (5)$$

And  $p_f$ , the far distance is

$$p_f = \frac{\frac{F d}{s}}{\frac{F d}{s} - 1} \quad (6)$$

Where:  $F$  = focal length of lens

$d$  = diameter of entrance pupil of lens

$s$  = diameter of circle of confusion

For television work, a useful diameter of the circle of confusion has been estimated as 1/200 of the height of the picture; this gives a value of  $s$  for the standard 4:3 aspect ratio of

$$s = \frac{X}{267} \quad (7)$$

Where:  $X$  = width of mosaic

Then equations (5) and (6) become

$$p_n = \frac{\frac{267 F d}{X}}{\frac{267 F d}{X} + 1} \quad (8)$$

$$p_f = \frac{\frac{267 F d}{X}}{\frac{267 F d}{X} - 1} \quad (9)$$

But from equation (4)

$$\frac{F}{X} = \frac{1}{2} \cot \frac{\phi_v}{2} \quad (10)$$

## Numerical Evaluation of Factors Involved in the Choice of Lenses, Particularly for the Image Orthicon Camera. Graphical Interpretation of Equations Offered to Facilitate Pickup Applications in Field and Studio

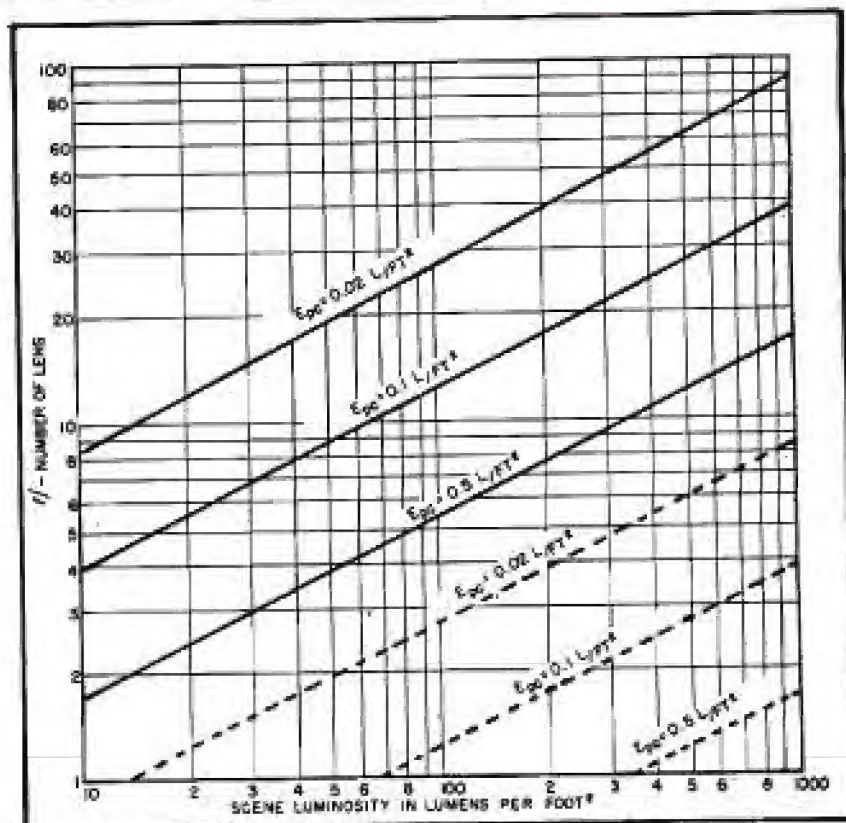
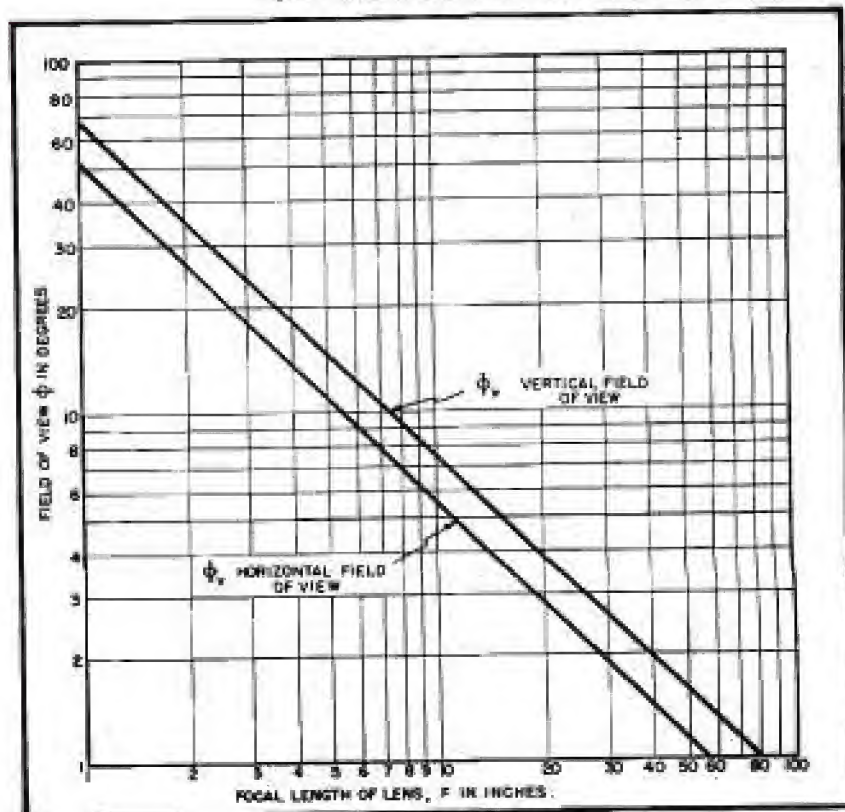


Figure 1 (above). Plot of scene luminosity versus 1/f-number setting.

Figure 2 (below). Angular field of view versus focal length of lens.





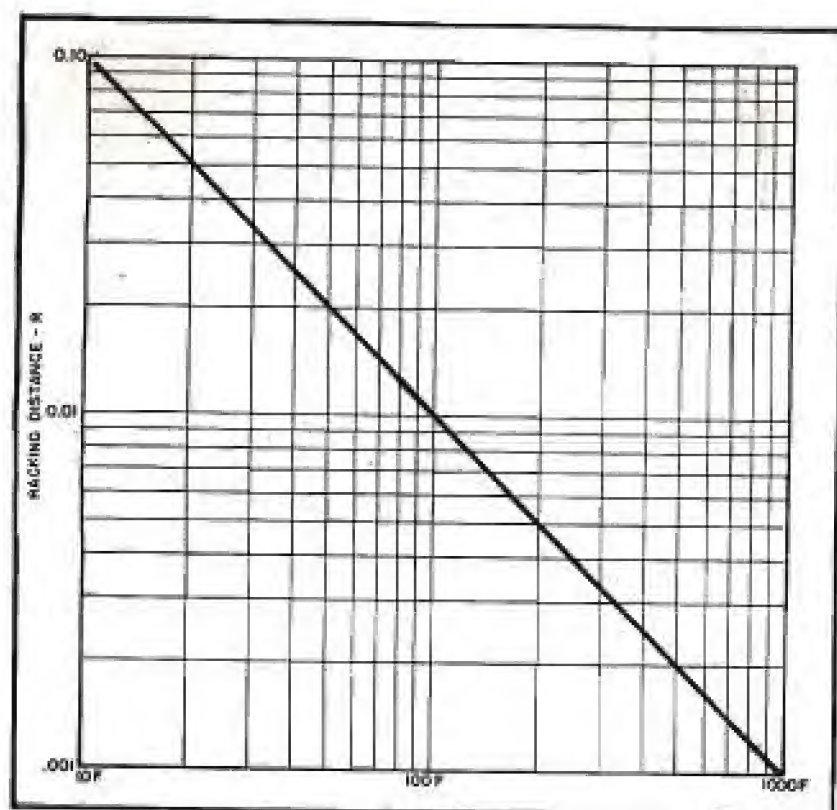


Figure 3  
Racking distance  $R$  versus  $S$ . Object distance  $S = nF$ , where  $n$  is the number of focal lengths of lens equivalent to the object distance.


Inserting this in equations (8) and (9), we have

$$p_s = \frac{133 d \cot \frac{\phi_s}{2}}{133 d \cot \frac{\phi_s}{2} + 1} \quad (11)$$

$$p_i = \frac{133 d \cot \frac{\phi_s}{2}}{133 d \cot \frac{\phi_s}{2} - 1} \quad (12)$$

If we let  $p_s \rightarrow \infty$ , by focusing the camera at infinity, then  $p_s$  becomes

Figure 4  
The hyperfocal distance versus the diameter of entrance pupil for a given horizontal field angle. (Courtesy IRE).

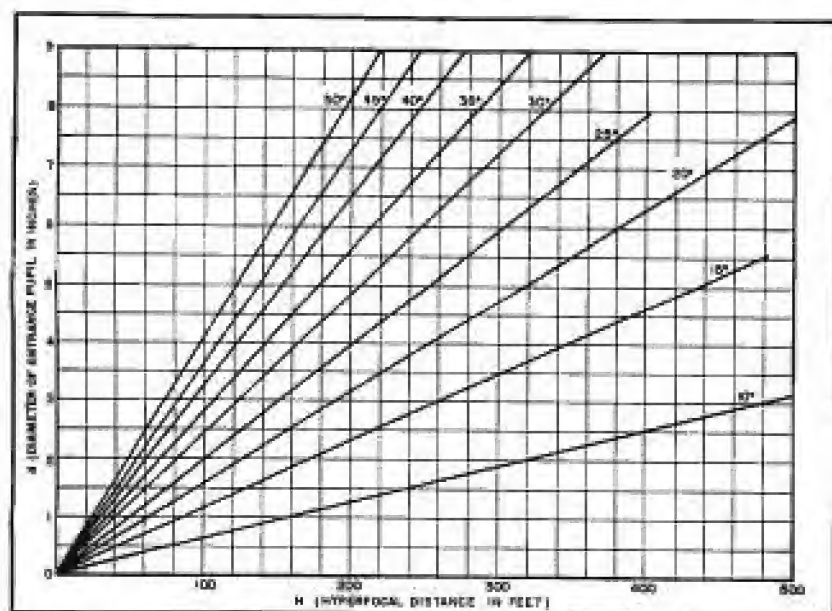

$$133 d \cot \frac{\phi_s}{2} = H \quad (13)$$

This distance is defined as the hyperfocal distance,  $H$ . The values of  $p_s$  and  $p_i$  in terms of  $H$ , are

$$p_s = \frac{H}{\frac{H}{p_s} + 1} \quad (14)$$

$$p_i = \frac{H}{\frac{H}{p_i} - 1} \quad (15)$$

Thus, if the camera is focused to a distance  $H$ , all objects from  $H/2$  to  $\infty$  are focused on the mosaic within a circle of confusion of diameter  $\delta$ , or  $1/200$  of picture height. In Figure 4 we have a graph of  $H$  versus  $d$  for various values of  $\phi_s$ . Also, when the lens is focused for a distance  $H/k$ , where  $k$  is any constant, then the region of good focus extends from  $H/(k+1)$  to  $H/(k-1)$ .

(E) The racking distance for the lens can be calculated from the equation

$$\frac{1}{S} + \frac{1}{S'} = \frac{1}{F} \quad (16)$$

Where,  $S$  and  $S'$  are the distances from object to first principal plane and from second principal plane to the image plane respectively. If we let the object distance,  $S$ , be equal to  $nF$ , where  $n$  is any number, then

$$S' = \frac{F}{1 - \frac{1}{n}} \quad (17)$$

It is often useful to consider only the variation from  $F$ , the focal length. Then we can say

$$R = S' - F = \frac{F}{n-1} \quad (18)$$


#### The 2P23 Image Orthicon

(A) *Required Scene Luminosity:* The sensitivity of the orthicon is such that about .1 lumen/foot<sup>2</sup> highlight luminosity on the mosaic gives 5 microamperes of signal output. The minimum noise is .2 microampere, thus a 25:1 signal-noise ratio is available at this level of photocathode illumination.

Using equation (1) from the basic design data, a plot of scene luminosity versus  $f/\#$  can be made; Figure 1. It is assumed here that a conservative transmission factor for normal lenses is .6 and that the illumination will be

(Continued on page 28)



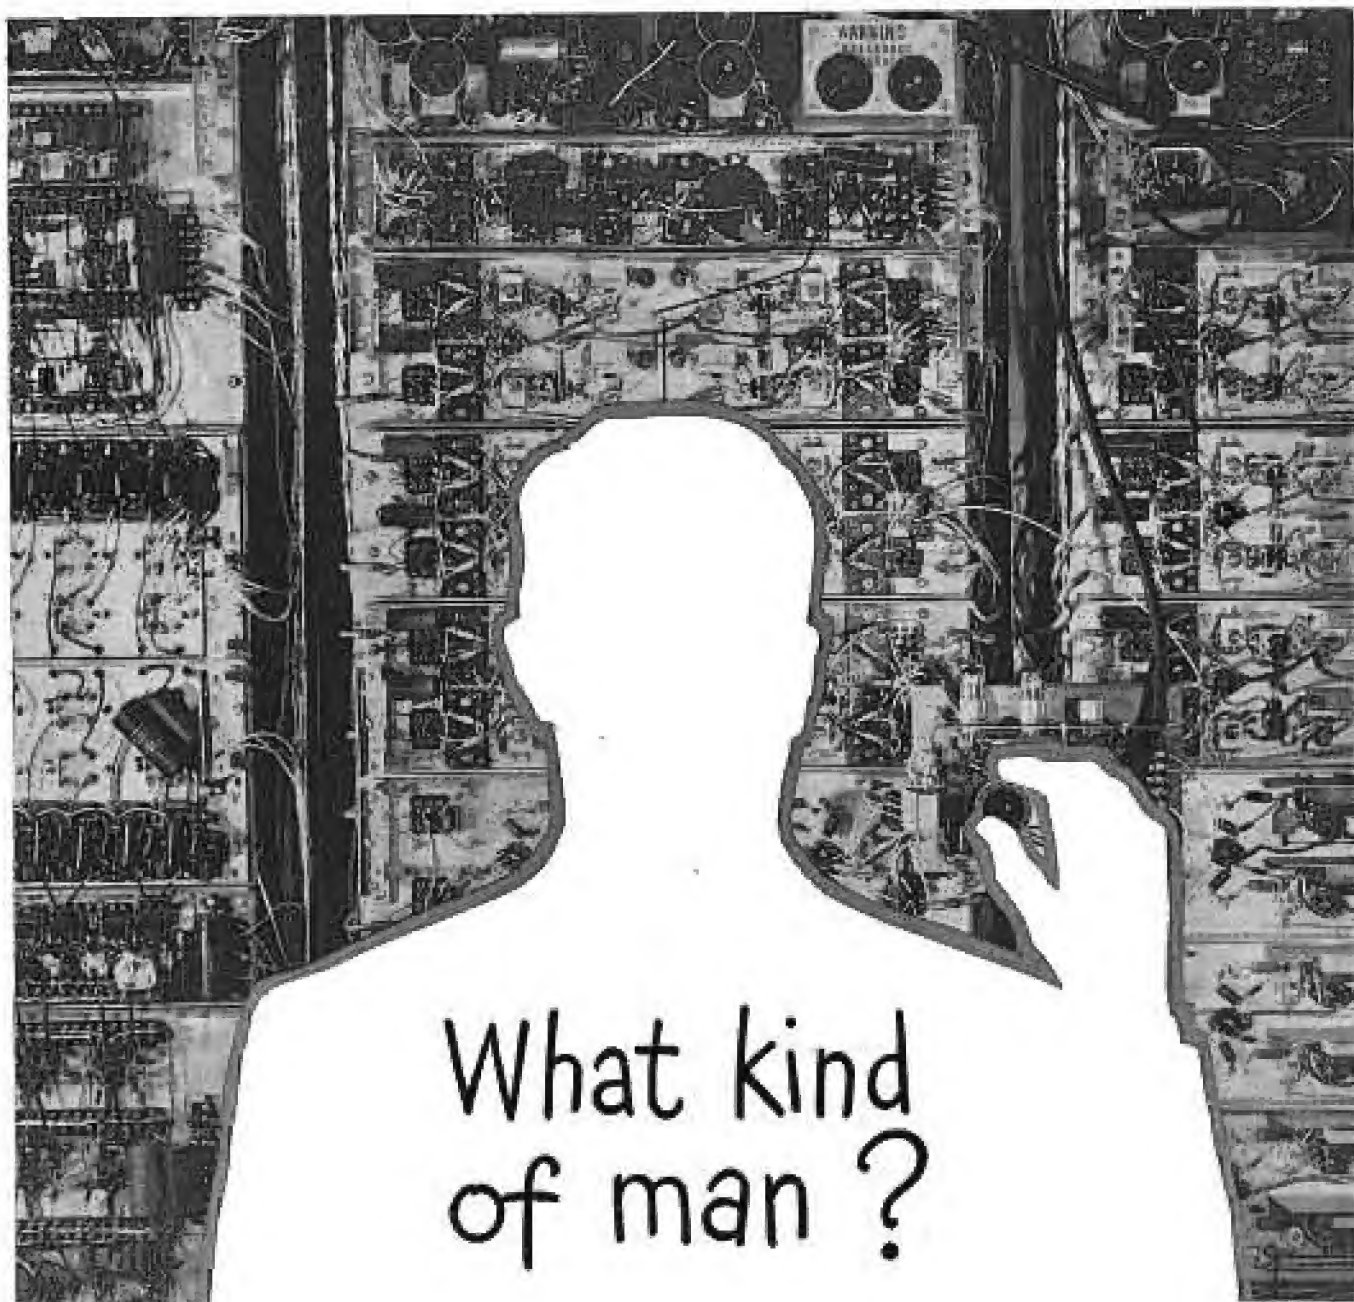

# What kind of man ?

WHAT KIND of men are the 2,300 scientists and engineers of Bell Telephone Laboratories?

Men of many types, working in different fields of research, may contribute to each development.

But all have certain characteristics in common: Good minds as a foundation, many years of learning in the fundamentals of their science and the methods of research, and a co-operative attitude — for without co-operation of individuals these products of research could never be produced.

Above all else, however, they have "the spirit to adventure, the wit to question, and the wisdom to accept and use."

That kind of men can produce the finest telephone equipment in the world — and have done so.



**BELL TELEPHONE LABORATORIES**

EXPLORING AND INVENTING, DEVISING AND PERFECTING FOR CONTINUED IMPROVEMENTS AND ECONOMIES IN TELEPHONE SERVICE





## VETERAN WIRELESS OPERATORS ASSOCIATION NEWS

W. J. MCGONIGLE, President

RCA BUILDING - 30 Rockefeller Place - New York, N. Y.

GEORGE H. CLARK, Secretary

VWOA LIFE MEMBER Jack Poppele offered quite an enthusiastic report on the future of television, during his annual address before the Television Broadcaster's Association, of which he is prexy.

He reported that tv is "skyrocketing at an almost staggering pace."

### Transmitter Increase

He pointed out that according to the recently-released FCC annual report there are 15 stations on the air, with 56 construction permits issued and 43 applications still pending.

"Just a year ago," he said, "I stated that six stations were operating, about 45 construction permits had been granted and 25 applications were still pending. Hence, the number of operating stations has nearly trebled during the year (several stations are about to begin operations), the number of applicants for new stations has nearly doubled and many more construction permits were handed out to potential broadcasters.

"On the receiving end of television, the picture is not only one of feverish activity, but by comparison with 1946 seems almost out of this world.

"On January 1, 1947, a total of 6,476 postwar receivers had been manufactured and distributed. This represented the total output among RMA-affiliated manufacturers for all of 1946.

"The picture for 1947 was totally different. Production of sets monthly leaped from a mild 5,400 in January to close to 25,000 in October. Total output for 1947 was close to 200,000.

### Prospects for '48

"It would appear that television is moving into one of its greatest years. With receiver production sweeping ever upward; with television stations hobbing up everywhere; with network facilities becoming more and more



VWOA life member J. R. Poppele reading his message on the year's progress in television before members of the TBA, of which he is president. JRP is also chief engineer and vice president of WOR.

available, 1948 should be a banner year for tv in every way.

### Convention Telecasts

"A tremendous stimulant to the acceptance of the tv industry will be the coverage which television will accord the Republican and Democratic National Conventions in Philadelphia next summer. It is no secret that the availability of television network facilities along the eastern seaboard had much to do with the choice of Philadelphia over other sections of the U. S. for both conventions."

### Programming

Discussing programming, Jack said that it has and is constantly becoming better.

"If the nth degree of perfection is still lacking in some presentations, it should be remembered that radio, motion pictures and the theatre passed through various stages of growing pains before high accolades were accorded the various and sundry presentations. The label of mediocrity which some critics have been prone

to attach to all television programming is certainly unfair to those individuals who, to date, have done an admirable job with only a minimum of funds and a paucity of facilities. Television programming will, of course, grow much better; it certainly is greatly improved over previous years.

### TV and Economics

"Ours is an industry that grows day by day. Whenever a new station opens in an area not presently serviced, it also opens the doorway to greater prosperity for many other enterprises related to television.

"Television has brought to viewers the greatest sports and news events of the day; it has taken millions of people right into the White House where they have been seated next to the President of the United States as he addressed them and others in the nation. Television is the great common denominator. Seeing is believing and having faith in our fellow man is democracy in action."

### VWOA Annual Meeting

THE ANNUAL MEETING of the Veteran Wireless Operators Association was held in the Marine Room of the Fireplace Inn, New York City, January 15.

Ballots for the election of officers and directors for 1948 were counted. W. J. McGonigle was reelected president. A. J. Costigan and Haraden Pratt were elected first and second vice presidents, respectively. William C. Simon was reelected secretary and H. T. Hayden was elected assistant secretary. C. D. Guthrie was elected to the treasury post.

On the new board of directors are W. C. Simon, George H. Clark, A. J. Costigan, C. D. Guthrie, W. J. McGonigle, J. R. Poppele, Fred Muller and Haraden Pratt.

Plans for the twenty-third anniversary dinner-cruise to be held at the Hotel Astor on February 28 were also discussed. Details will be mailed to members.



## 20 KW Transmitter with CONTINUOUS TUNING FROM THE FRONT PANEL


C.W.  
F.S.  
Phone



- **CONTINUOUS TUNING.** Continuously tunable from the front panel over its entire frequency range of 2.85 to 22.5 mc. Tuning circuits simple to operate.
- **MAXIMUM OPERATING CONTINUITY.** Recycling overload relays insure against loss of operating time due to temporary overloads. Control circuits fulfill rigid broadcast requirements.
- **COOL OPERATION.** By electrically short circuiting sources of resistance from moving parts, heat and power loss are reduced considerably.
- **SAFE OPERATION.** Automatic-safety grounding switches used on all cabinet doors and housing openings. All operating controls are grounded. Interlocked control circuits.
- **EASY TO MAINTAIN AND SERVICE.** Components are readily accessible and individually removable for replacement and repair.

### Continuous Tuning Plate Circuit

- Frequency changes can be made in a few seconds.
- Alternate paths for current around moving parts of circuit provide high efficiency and cool operation.
- Glass-banded mica assembly supports inductances by holding coils rigid—permits precision adjustment of coil relationship.
- All parts removable and easily accessible to operating personnel.



**J. H. BUNNELL & Co.**

215 FULTON STREET NEW YORK 8, N. Y.

**BUNNELL—a key word in  
communications equipment**

Research, Engineering, Production, and Testing facilities for equipment for: Wire Lines • Submarine Cables • Railroad Communication • Radio Airway Systems • Municipal Signaling • Army and Navy Signaling • Carrier Current • Automatic Telegraph • Facsimile



# F-M and TV TRANSMISSION LINE Installation Problems



Figure 15

General view of an f-m/a-m horizontal isolator installed at WBNS-WELD.

Part II of Discussion of Materials, Components, Accessories and Methods Used in Installation of Coaxial Transmission Lines from Transmitter to Antenna. Assortment Includes Special Gas Barriers, Inner Conductors and Line Supports, Elbows, Mounting Fittings, Clamp Connectors, Flanges, Reducers, Pressure Controls, Isolators, etc.

by J. S. BROWN

Assistant Chief Engineer  
Andrew Company

IN THE INITIAL installment<sup>1</sup> appeared a discussion of the installation of the insulated section on the tower which is effected by the use of insulated mounting clamps and support brackets. These supports are designed to apply stresses to the porcelain insulators so that the porcelain is always in compression.

It was pointed out that when the insulated section of line is installed on the ground, it may be done in several ways. The simplest is merely to mount the f-m line on standoff insulators for the proper distance away from the tower base. This method has the disadvantage that the line, forming one conductor of an unshielded, unbalanced transmission line section, will radiate at the a-m frequency, which will distort the a-m radiation pattern. Furthermore, this radiation is very difficult to control, making ad-

justment of direction arrays very difficult. Usual practice is to stimulate a coaxial line section, in which the f-m line forms the inner conductor. The outer conductor may be either a wire cage or a metallic hood enclosing the f-m line.

Photographs of such an installation, made at WBNS-WELD, Columbus, O., are shown in Figures 15, 16, and 17. This particular installation accommodates two 3/4" lines. Figure 15 shows a general view of the *banooka*. Figure 16, showing one section of cover removed, illustrates the type of construction. The transmission lines are supported on a stair channel by

standoff insulators. The hood is formed of 1/16" thick aluminum sheet, and is attached to the stair channel by means that allow easy removal for maintenance. The view shows an expansion joint in one of the lines. Figure 17 shows the tower end of the isolator.

Expansion of the line and enclosure must be taken into consideration, so the lines are supported so that they may slide. The line is rigidly anchored at the shorted end of the section, and again at the tower end, with an expansion joint in the middle of the run.

The insulated section, either when mounted on the tower or on the ground, is often made slightly less


Figure 16

One section of cover removed to show construction of f-m/a-m isolator.




Figure 17

Tower end of section of f-m/a-m isolator. Note compensated right angle junction box.

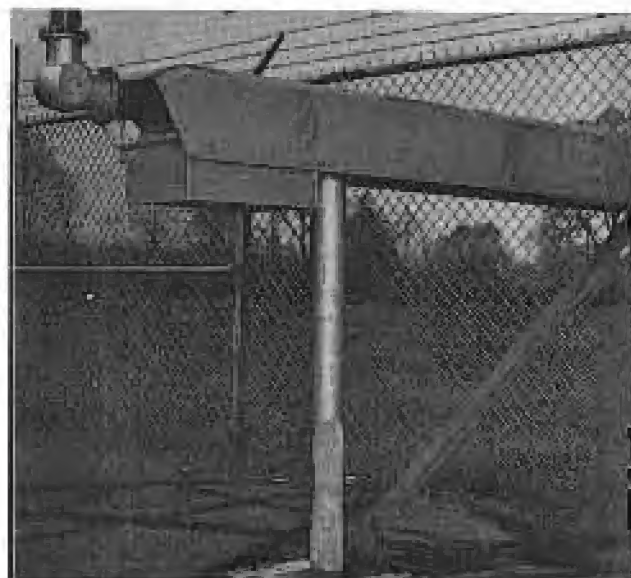



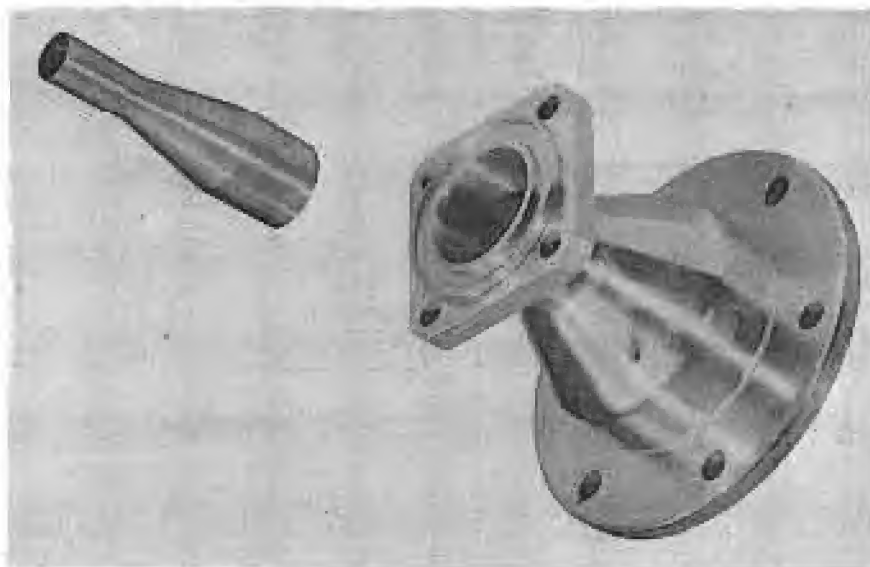

than a quarter-wave long, and a variable capacitor is connected across the open end of the line for use in making the final adjustment. In Figure 17, the housing directly beneath the end of the hood contains a variable capacitor used for this purpose.

Many miscellaneous fittings are required to meet the requirements of a complete installation. When a 20' section of line must be cut in the field, it is necessary to provide a solderless fitting that will take the place of the flange that was cut off. Such a device, called a clamp connector, is illustrated in Figure 18.

Reducers are sometimes required, when it is necessary to join lines of different sizes. This occurs often at the transmitter output. A particular installation may require a transmission line of larger size than that of the output stub on the transmitter, because of transmission line efficiency requirements. The reducer, shown in Figure 19, is intended to connect  $3\frac{1}{4}$ " and  $1\frac{1}{2}$ " lines together.

In order to pressurize the line, gas-tight end terminals must be used. Two types may be used. Figure 20 shows one, more properly called a gas bar-

rier, intended for installation in a line where minimum reflections are desired. Special attention has been given to maintaining electrical continuity. A second type of end terminal is shown in Figure 21. This terminal is designed for outdoor use, for such applications as connections to antennas.

Provision must be made for introducing the dry air or nitrogen with which the lines are pressurized. This is, of course, usually made at the transmitter end of the line. It is also necessary to provide a means of opening the line at the far end, in order to bleed the line. By this means any moisture that may enter the line may be removed by allowing dry air to blow through the line and evaporate the moisture.

The foregoing has been an attempt to describe standard lines and fittings. Special assemblies and accessories galore are required for specific installations, as might be expected when the multiplicity of various field conditions is considered. Some of the *specials* are required only once—others prove to be of great utility and become standard items.



Figure 18 (above)  
Clamp connector, for use when 20' section of line must be cut in the field.

Figure 19 (left)  
Reducer,  $3\frac{1}{4}$ " to  $1\frac{1}{2}$ ". Note sliding flange on small end.

Figure 20 (below)  
Gas barrier (sectioned) for installation between two standard flanges.

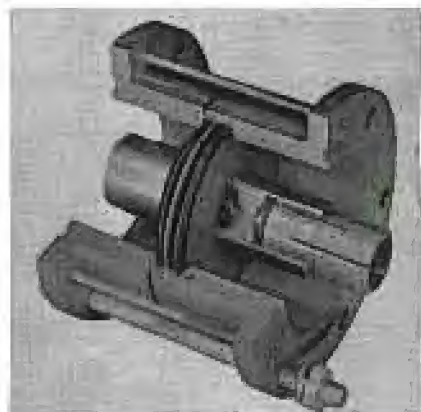
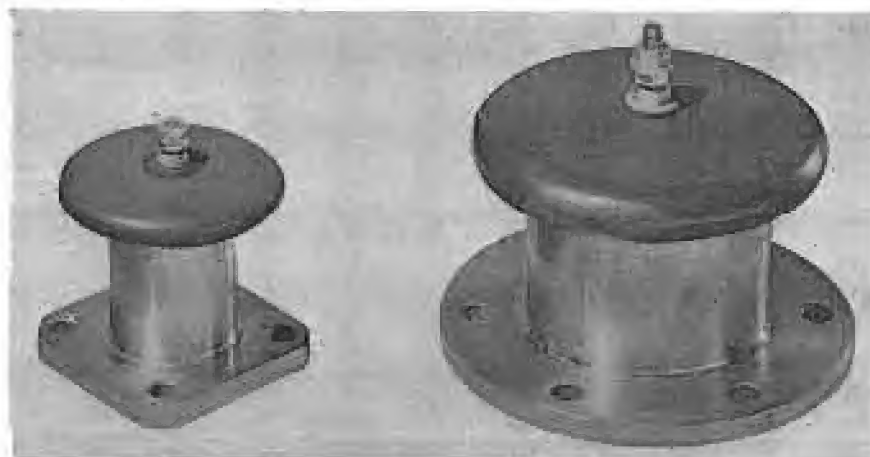


Figure 21 (left)  
End terminals for outdoor use.

Figure 22 (below)  
Gas inlet fitting, to be installed between standard line flanges.





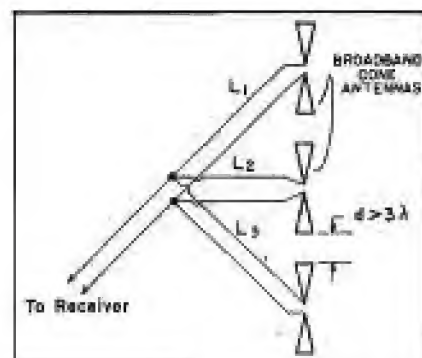
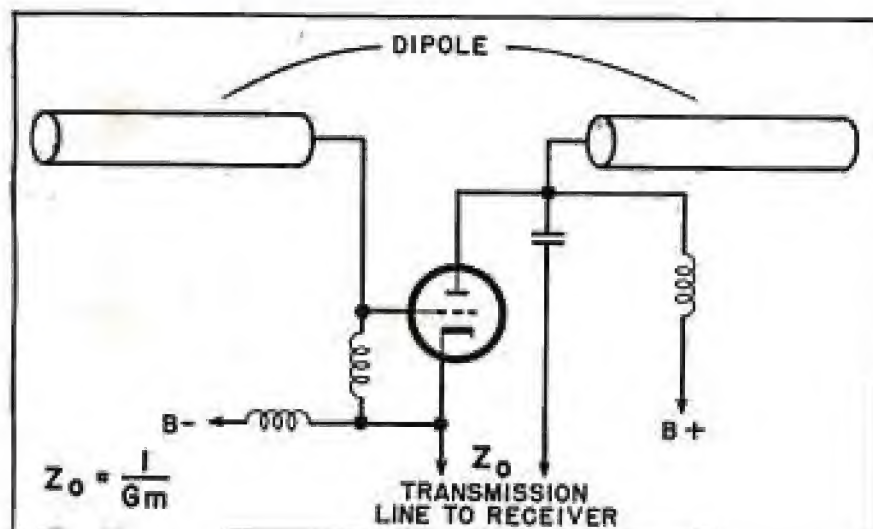


Figure 1 (above)  
Array of conical elements.  $L_3 = L_1 + n\lambda$  and  $L_2 = L_1 + k\lambda$ , where  $n$  and  $k$  are integers which will give broadside array, but to work over a wide band  $n = k = 0$  is necessary.

Figure 2 (left)  
Simplified circuit of the cathode-follower dipole.

# Cathode-Follower TV-Antenna System

**Antenna Array Operates in the 44 to 88-Mc and 175 to 216-Mc Bands, with a Standing-Wave Ratio on Transmission Line Always Less Than 2:1 and with a Gain at All Frequencies.**

by **E. G. HILLS**

Division Engineer  
Belmont Radio Corp.

THERE HAS LONG EXISTED the need for an antenna that will receive from the same direction over a wide band (several octaves) of frequencies with a limited beam width. This need has become more pronounced with the accelerated advance in television use in the 44 to 88 and 175 to 216-mc bands.

As the frequency of operation of a directive antenna is changed, the two most important properties of the antenna to change are: (1) Its beam of radiation or reception changes in beam width, direction and various side lobes appear and disappear; (2) its input impedance changes.

Certain antennas such as the non-resonant wire antenna,<sup>1</sup> the non-resonant V antenna,<sup>2</sup> the rhombic,<sup>3</sup> and various antennas built up of conical elements, have impedances that remain substantially constant over several octaves of frequency. In all of these antennas, a variation of frequency of over one octave causes the beam to change direction or broaden. Although a conical antenna may have gain over wider ranges, it is not very considerable. Other antennas such as

horns, or radiators feeding into parabolic reflectors, can be built to have good gain in a given direction but suffer from input impedance variations as the frequency is changed much over an octave.

It would, of course, be possible to build up an array of double cone antennas, as illustrated in Figure 1, to operate say as a broadside array if the spacings of the individual elements were great enough that mutual impedances between the elements would not alter the phases or amplitudes of the cone currents appreciably. This spacing would have to be of the order of three wavelengths<sup>4</sup> at the lowest operating frequency of the array and, as the gain of an array of given length goes down rather rapidly as the spacings between elements is increased, the efficiency

of use of the space occupied by the array would be very low. Another factor enters the picture when considering the use of conical elements. For a double cone to be of substantially constant input impedance its overall length must be of the order of a half wavelength at the lowest operating frequency. As the frequency is increased, the action of the double cone antenna is something of a compromise between that of a long wire antenna and the biconical horn antenna. Its beam tends to broaden and split into separate lobes which radiate in directions which move farther from the normal to the axis of the cone as frequency is increased. Since the radiation pattern of a transmitting array, or the reception pattern of a receiving array, may be considered to be the products of the patterns of one of the array elements, and the pattern of the same array made up of isotropic radiating or receiving elements<sup>5</sup> the reception from the broadside array would be low at the frequency at which the double cone elements had nulls in their patterns in the desired direction of reception. This, of course, could be remedied, if the desired impedance characteristic could still be obtained, by tilting the axes of the two conical elements making up each dipole with respect to each other.

## Array Band with Limitations

Before going into the reasons for operation of the array to be described, it will be useful to examine the operation of a conventional array of dipoles as the frequency of operation is changed. Let us assume a broadside array of elements carrying equal currents, in which the different elements are fed from a common transmission line junction through trans-

<sup>1</sup>Harold H. Beverage, C. W. Rice, Ed. W. Kellogg, *The Wave Antenna—A New Highly Directive Antenna*, Trans. AIEE, Vol. 42, p. 215; 1923.


<sup>2</sup>P. S. Carter, C. W. Hansell, N. E. Lindenthal, *Development of Directive Transmitting Antennas by RCA Communications, Inc.*, Proc. IRE, p. 1773; Oct., 1931.

<sup>3</sup>E. Bruce, A. C. Beck, L. R. Lowery, *Horizontal Rhombic Antennas*, Proc. IRE, p. 24; Jan., 1934.


<sup>4</sup>P. S. Carter, *Circuit Relations in Radiating Systems and Applications to Antenna Problems*, Proc. IRE, p. 1604; June, 1932.

<sup>5</sup>S. A. Schalkunoff, *A Mathematical Theory of Linear Arrays*, Bell System Technical Journal; Jan., 1943.



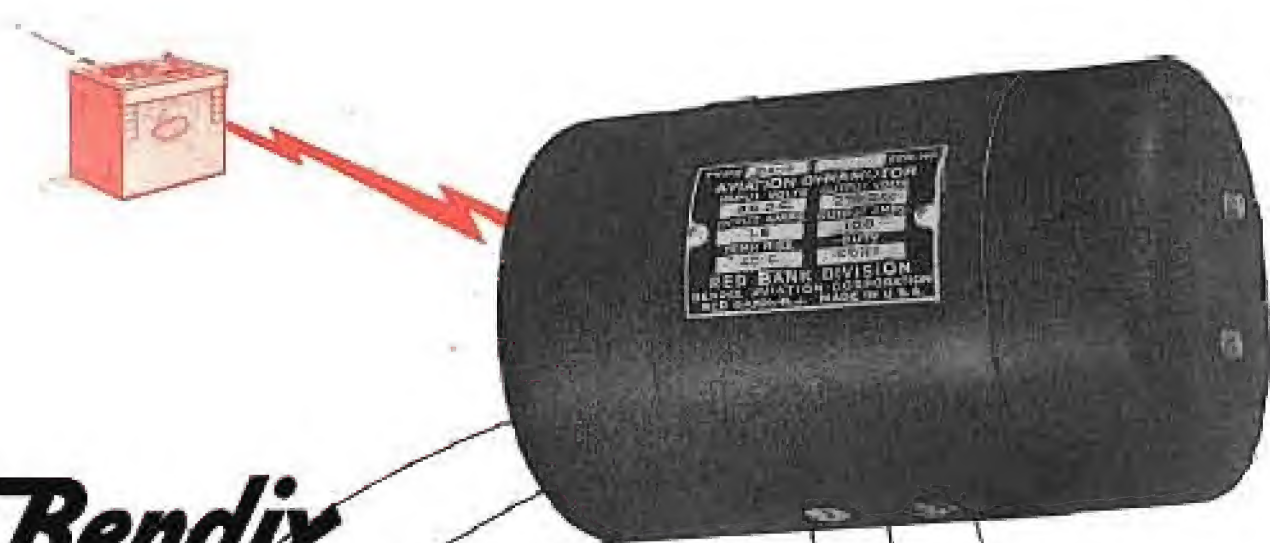

# **Bendix** **DYNAMOTORS** bring new efficiency and economy

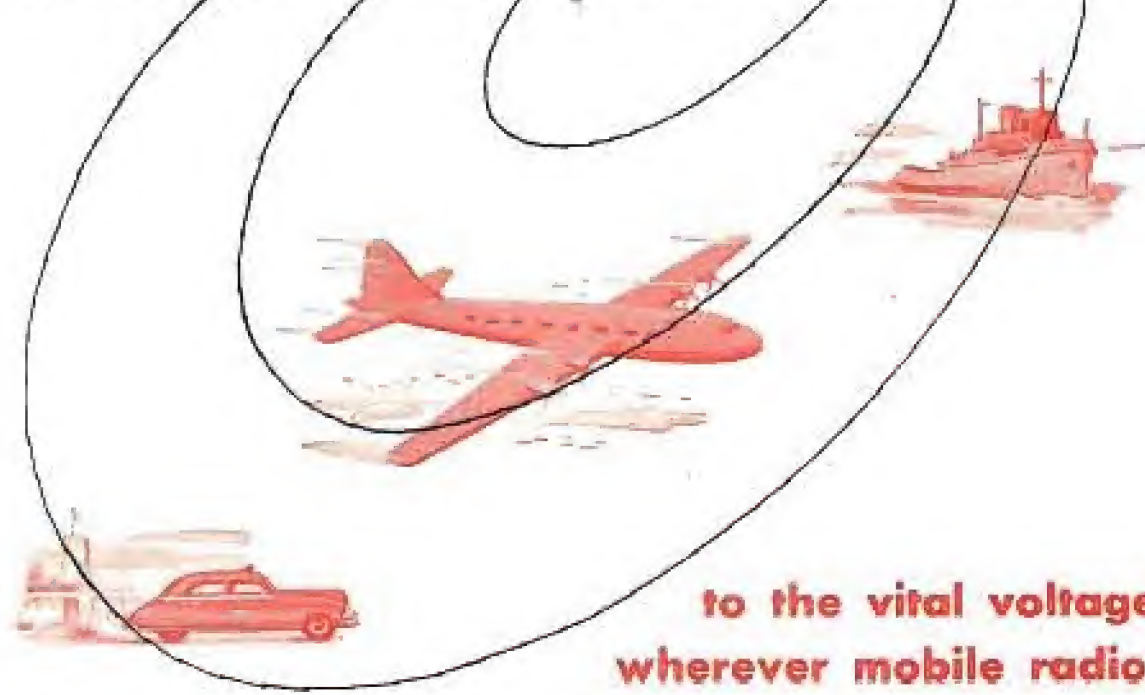

**to the vital voltage link  
wherever mobile radio is used!**

## **89 DIFFERENT MODELS** Covering all frame sizes and voltages

Bendix Dynamotors cut down on service requirements—are designed for easy servicing with standard tools, and feature complete interchangeability of parts. Write for details—there's a Bendix Dynamotor tailor-made for your installation!

Wherever a mobile radio operates from a storage battery, *Bendix\** Dynamotors can add materially to *efficiency* and *economy*. These precision-built units have a remarkably long life—operate day after day with virtually no service, providing the vital voltage that is the key to efficient performance. If you are designing a new mobile radio set or replacing dynamotors, specify Bendix Aviation Quality Dynamotors—they're priced right and built by the foremost producer of mobile power equipment. Available for quick delivery in all standard frame sizes and voltages.

\*REG. U.S. PAT. OFF.  
Dynamotors • Inverters • Converters • D.C. Motors • Carbon Pile Voltage Regulators

**RED BANK DIVISION of**  
RED BANK, N. J.







Figure 3  
Cathode-follower dipole for the television band.

mission lines, the lengths of which differ by integral multiples of a wavelength. Since the voltages at the ends of these transmission lines would all be in phase if the lines were terminated in identical loads it is necessary (except for the case of  $90^\circ$  lines) that the elements all present the same complex impedances to their respective lines, when connected to these lines, in order that equal, in-phase, currents flow in the elements. In order that the element impedances be equal when arranged in the array, the elements must,

the various transmission lines change such that they no longer differ by integral multiples of wavelengths. Even if at a new frequency the dipole input impedances were still identical, their currents would have changed relatively because of this change in relative electrical lengths of the transmission lines, with resulting deterioration of the array reception pattern.

The radiator input impedances, however, do change as a result of two effects with resulting aggravation of the radiator current non-uniformity. One effect is that


mission lines, (2) change in element feed point impedances when isolated from other elements, (3) change in mutual impedances between radiators when placed in an array, and (4) change in number of wavelengths in physical spacings of the array elements.

The effects of the first and fourth type of changes can be overcome together, not only for a broadside array but for an end-fire or any other type of array, in which the signals received from the various elements are added together in phase at the various transmission line junctions as is often the case in high gain arrays. This can be done by making the total electrical length of the composite path (through free space and transmission line) that the signal must travel from the distant transmitting source to the output terminals of the array, the same regardless of which element, with its corresponding transmission line, the signal is considered as traveling. For the case of a broadside array, this would merely mean the making of all of the transmission lines from the array terminals to each element in the array of equal electrical length. By this is meant signal length, not phase length, as the phase length could be equal at any one frequency if different transmission lines differed in length by integral multiples of full wavelengths, while the distances a signal would actually travel in the different lines would be unequal.

The above choice of transmission line lengths insures that the signals from the various elements will reach the receiver all in phase at all frequencies, but does not insure that any transmission line section, that may be used in the capacity of a transformer, will operate regardless of frequency. This will not be the case, so the array must be designed using no transmission lines as transformers for impedance matching. Instead elements of the proper impedances must be used in various parts of the array and the lines leading to them must be matched to the elements. This is because the only transmission line acting as a transformer, that has the same transformation ratio regardless of frequency, is one having a 1:1 ratio at all frequencies, or, in other words, a matched line.

The second type of change, that of the isolated element feed point impedance changing with frequency, has been overcome in any of the broad-band antennas in use at present, such as those using conical elements. It has also been overcome in the cathode-follower antenna system, which will be analyzed in this paper.

The third change, that of the mutual impedances between elements of an array changing with frequency, can be minimized in its effect by placing the elements so far apart in space that the mutuals existing between them are negligible. This, as was mentioned earlier, causes the array to be very wasteful of space. A second method is that of reducing the currents flowing in the various elements to such low amplitudes that

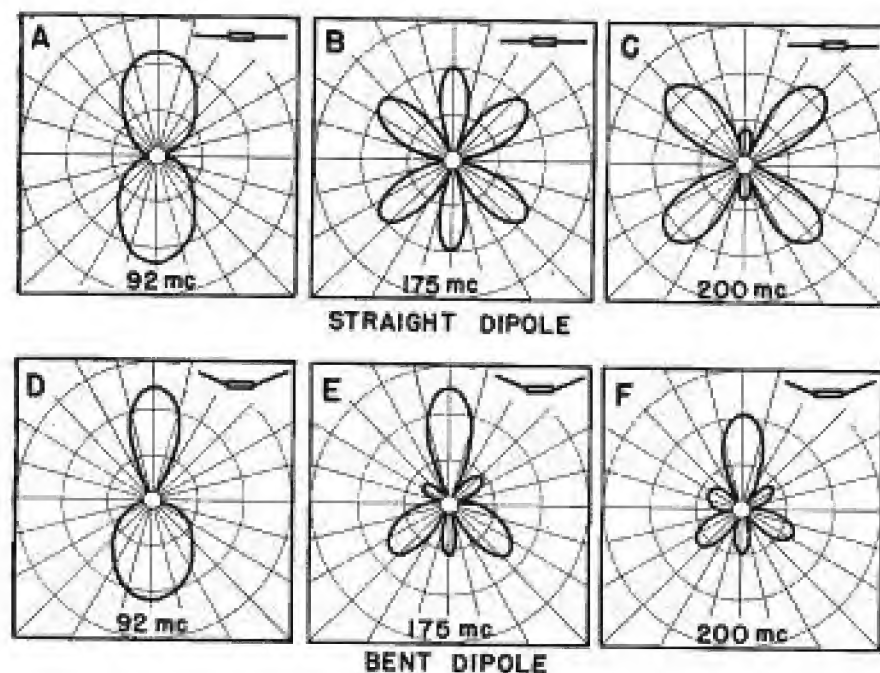

of course, be in general different from each other, because if they had identical impedances, when isolated from the other elements, the mutual impedances between the elements when placed in the array would alter the element input impedances, so that they would not be identical.

As the frequency of operation of the array is changed, the electrical lengths of

the impedances of the radiators if isolated change, in general, with frequency and the other is that the mutual impedances between the radiators when placed in the array change with frequency.

To summarize the reasons for deterioration of an array's operation with frequency change, one has (1) change of electrical lengths of radiator feed trans-

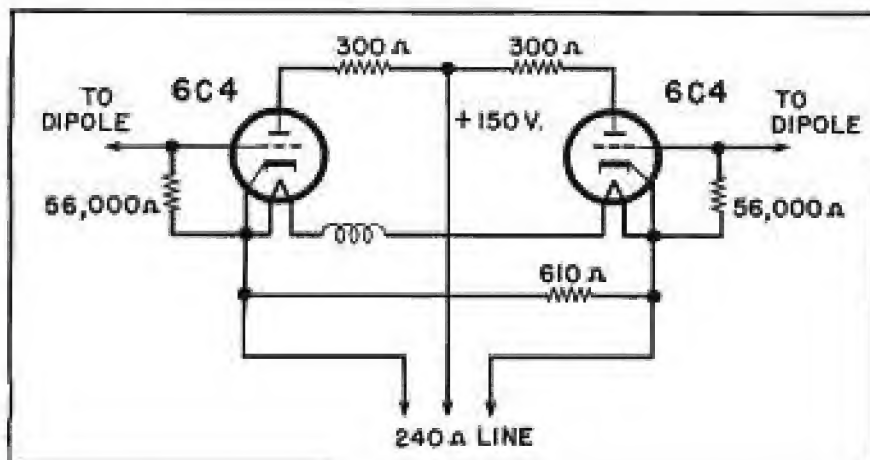


Figure 4 (left, center)  
Cathode-follower dipole reception patterns.

Figure 5 (left)  
Balanced cathode-follower circuit.



there is no appreciable voltage induced in an element by current flowing in another element, compared to the voltage induced in the element by the incident wave being received. This reduction of current flow can be accomplished by terminating the receiving element in an impedance much greater than its feed-point impedance. This has the undesirable effect, of course, of reducing the efficiency of power transmission from the receiving element to its transmission line, a point which will be considered in another portion of this article. This element current reduction is, however, accomplished in the cathode-follower dipole.

### Cathode-Follower Antenna

Figure 2 illustrates a dipole feeding directly into a cathode follower of such mutual conductance that the cathode-follower output impedance matches the transmission line leading from the dipole. Disregarding small stray capacitances, the output impedance of such a cathode-follower is independent of frequency, and also independent of the impedance of the generator driving it. The transmission line in the figure will then be matched regardless of what the dipole impedance does as frequency is changed. Since the input impedance of a cathode-follower can be extremely high, compared to ordinary dipole feed-point impedances, as long as transit time loading does not enter the picture, the current flow in the dipole of Figure 2 is very low for all frequencies for which the dipole length is appreciably less than a full wavelength. This is true because the dipole is essentially open-circuited when the cathode-follower is inserted in its center. Because of this low dipole current, the third type of change previously mentioned, mutual impedance change, does not cause a deterioration of the directivity pattern of an array made up of cathode-follower antenna elements. As the cathode-follower does not load the dipole efficiently, the dipole open-circuit voltage is applied to the cathode-follower grid, giving approximately twice the voltage input to the cathode-follower that would be applied to it if its input impedance matched the dipole internal impedance. Since the voltage output of a dipole increases as the square root of its radiation resistance, folding the dipole doubles the voltage applied to the cathode-follower.

In Figure 3 appears a view of a cathode-follower dipole in which two folded dipoles were essentially connected in parallel to the input of a cathode-follower which is enclosed in the center portion of the dipole. The two dipoles were adjusted for the high and low television bands, respectively.

Figure 4 (a, b and c) shows the reception patterns taken with the dipole of Figure 3, in which the two halves of the dipole were colinear. Parts d, e and f of the figure show the reception patterns taken with the two halves of the dipole bent so that they make angles of  $130^\circ$  with each other. This was necessary in order that the dipole receive from the same direction at all frequencies of interest.

### Cathode-Follower Circuit

In the circuit, Figure 5, two cathode-followers are used in a push-pull arrange-

(Continued on page 30)

Figure 6  
A 12-dipole array.

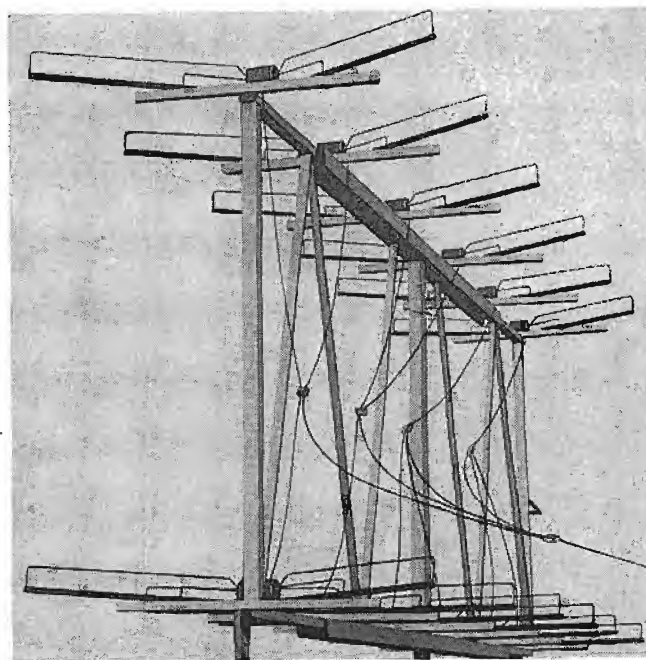


Figure 7  
Gain and standing-wave ratio of a cathode-follower antenna.


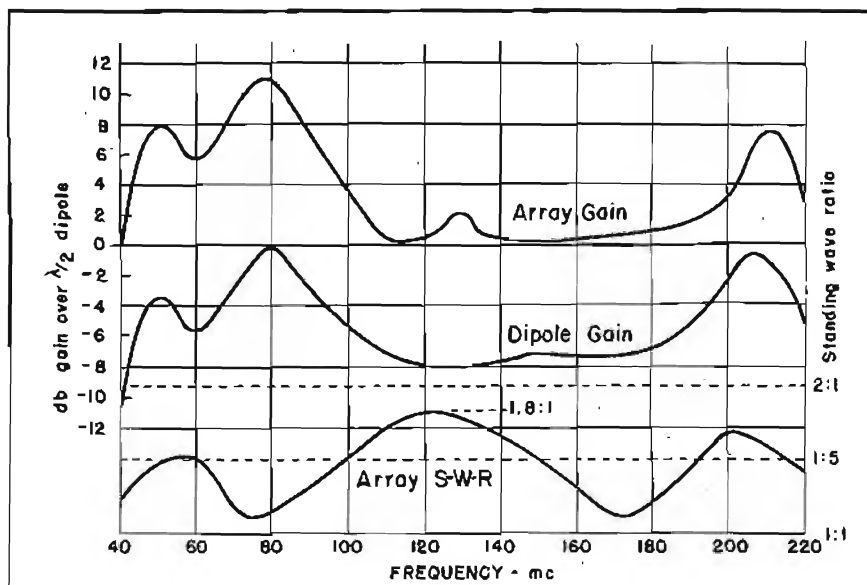


Figure 8  
Transmission line network ( $m$  = the dipole total of 27).  $K$  = (the number of junctions from an element to the receiver,  $n$  = the number of lines converging per junction, and  $m = n^k$  = total number of dipoles in array. The signal-noise ratio in db =  $10 \log_{10} m$ ).



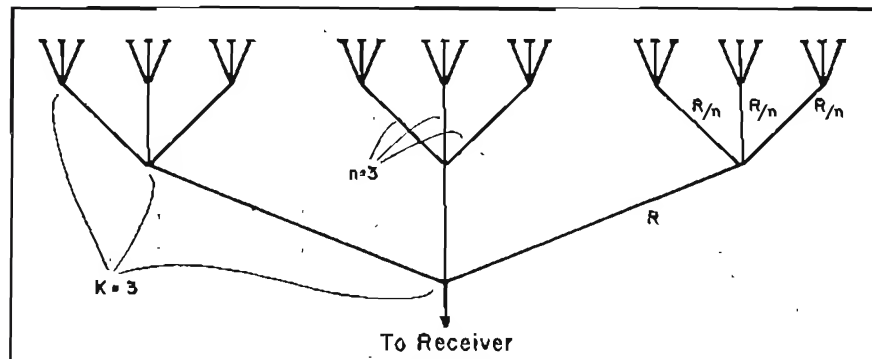

# Tube Engineering

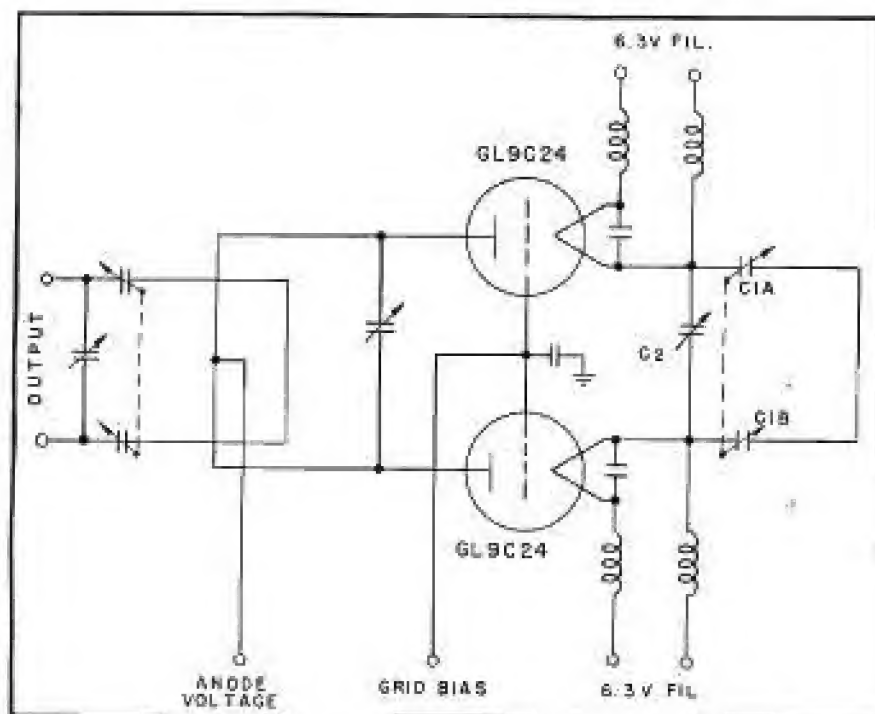


Figure 1  
Typical grounded-grid amplifier circuit for the GL-9C24.

## V-H-F Tube Design

Two types of v-h-f tubes, with quite a few unusual features, have been announced recently. One, the GL-9C24,\* especially designed for use as a high-power grounded-grid amplifier, features an introverted anode and the ring-seal design. Inside the tube a conical flange connects the grid ring to the grid basket. This flange provides a long plate-to-filament capacity (less than 0.6 mufd) and, as a result, no neutralizing is necessary up to 100 mc.

In Figure 1 appears a typical output circuit using the tubes. No swamping

or grid-loading resistor is required, loading being controlled by adjustment of the ratio of anode and filament variable capacitors.

These tubes are being used in pairs in tv transmitters, providing 5-kw peak power in the linear class B output stage.

The tube is water-cooled by eight gallons per minute through the anode and one quart per minute through the filament. The glass seals are air cooled.

## The 5618

Another v-h-f tube, a filament-type miniature pentode (5618\*\*), developed

particularly for mobile and emergency communications, has a maximum plate dissipation of 5 watts and can be operated with full input to 100 mc.

The filament is of the mid-tapped coated type which can be operated on either 6 or 3 volts, within an operating range of  $\pm 10\%$ , and is said to be ready for operation in less than one second after power is turned on.

The 5618 can be used as an a-t power amplifier and modulator (class A<sub>1</sub>), r-f power amplifier and oscillator (class C telegraphy) and r-f power amplifier (class C f-m telephony), as well as a frequency multiplier.

## Filament Arrangements

In class A<sub>1</sub> use, the d-c plate voltage is 300, d-c grid (No. 2 screen) voltage is 125 and grid No. 2 input is two watts, while the plate dissipation is 5 watts. These are maximum ratings (absolute value) for intermittent and commercial amateur service. In this application, either series or parallel filament arrangements can be used. With either filament arrangement, the d-c plate voltage is 250, d-c grid (No. 3) voltage is zero, d-c grid (No. 2) voltage is 75, d-c grid (No. 1 control-grid) voltage is -8 and the peak a-f (grid No. 1 to grid No. 1) voltage is 8.

The maximum signal power output with the series-filament arrangement is 1.2 watts. With the parallel arrangement it is 1.4 watts. The effective load resistance (plate-to-plate) is 12,000 ohms.

When the tube is used as an r-f power amplifier and oscillator<sup>†</sup>, 300 volts can be used on the plate at either 40 or 80 mc. The useful power output in this arrangement at 40 mc is 5 watts and at 80 mc, 4.5 watts.

Plate voltage of the 5618 when used as a doubler or tripler to 80 mc is also 300. The useful power output of the tube when it is used as a doubler is  $3\frac{1}{2}$

Table 1  
Preferred types of o-c and camera tubes.

Screen Size (Inches)	Kinescopes		Scope Types	Camera Types	Mono-scope
	Directly Viewed	Projection	PI Screen		
2			2BP1	5527	
3			3KP1	2P23	
5				5655	
7	7DP4 7JP4	5TP4	5UP1		2P21
8					
10	10BP4			1850-A	

\*G. E.  
\*\*RCA.

<sup>†</sup>Key-down conditions without amplitude modulation. Modulation essentially negative may be used if the positive peak of the a-f envelope does not exceed 115% of the carrier conditions.



## Design and Application Notes on 5-Kw TV Tube, V-H-F Miniature Power Pentode and Image Orthicon for Studio and Field.

watts, and 2.7 watts for tripler operation.

Approximate driving power for the 5618, in doubler or tripler application, is .75 watt.

### Camera Tubes

AN IMAGE ORTHICON, particularly designed for studio use and other applications employing artificial illumination, is now available. The tube, type 5655\*\*\* differs from the 2P23 in that its photocathode has practically no infrared sensitivity, its resolution is somewhat better and its signal-to-noise ratio has been improved about twice. Since the photocathode does

not respond to infrared, colors are portrayed with more satisfactory gradation under a suitable combination of fluorescent and incandescent illumination. It does not, however, cover as wide a light range as the 2P23.

Relatively small in size like the 2P23, the 5655 can be used in comparatively light-weight portable television cameras.

The 5655 is not directly interchangeable with the 2P23.

### Preferred Tubes

A LIST OF PREFERRED TYPES of tubes, including power amplifiers and oscilla-

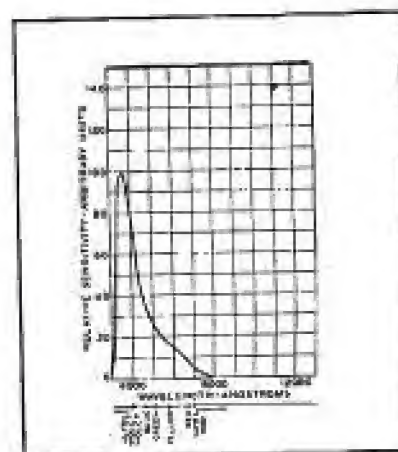


Figure 2

Spectral sensitivity characteristic of the 5655, for equal values of radiant flux at all wavelengths.

tors and cathode-ray and camera tubes, has been announced\*\*\*. These listings, shown in tables 1 and 2, cover pentodes, beam types, tetrodes and triodes, and picture, 'scope and camera tubes and monoscopes.

\*\*\*Prepared by the tube department of RCA.

\*\*\*RCA.

Table 2

Preferred types of amplifiers and oscillators.

Type	Class	Maximum Input Power vs. Frequency												
		Values shown are class C telegraphy ratings for continuous commercial service												
		1.6	7.5	15	25	50	75	110	150	200	250	300	600 mc	
802	Pentode	25	25	25	25	20	16	...	...	...	...	...	...	watts
21E26	Beam	30	30	30	30	30	30	30	25	...	...	...	...	watts
832-A*	Beam	36	36	36	36	36	36	36	36	36	32	...	...	watts
2E24	Beam	40**	40**	40**	40**	40**	40**	40**	33**	...	...	...	...	watts
807	Beam	60	60	60	60	60	50	40	...	...	...	...	...	watts
815*	Beam	60	60	60	60	60	60	60	55	40	...	...	...	watts
8025-A	Triode	75	75	75	75	75	75	75	75	75	75	75	75	watts
829-B*	Beam	120	120	120	120	120	120	120	120	120	105	...	...	watts
826	Triode	125	125	125	125	125	125	125	125	125	125	100	...	watts
812	Triode	155	155	155	155	155	125	...	...	...	...	...	...	watts
811	Triode	155	155	155	155	155	125	...	...	...	...	...	...	watts
828	Pentode	200	200	200	200	160	130	...	...	...	...	...	...	watts
8005	Triode	240	240	240	240	195	...	...	...	...	...	...	...	watts
5588	Triode	250	250	250	250	250	250	250	250	250	250	250	250	watts
813	Beam	360	360	360	360	300	...	...	...	...	...	...	...	watts
8000	Triode	500	500	500	500	400	300	...	...	...	...	...	...	watts
4-125A/ 4D21	Tetrode	500	500	500	500	500	500	500	500	425	335	...	...	watts
6C24	Triode	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	...	...	...	...	kw
833-A	Triode	1.8	1.8	1.8	1.75	1.5	1.2	...	...	...	...	...	...	kw
7C24	Triode	5	5	5	5	5	5	5	...	...	...	...	...	kw
8D21*	Tetrode	10	10	10	10	10	10	10	10	10	10	10	...	kw
889R-A	Triode	16	16	16	16	12	9.6	...	...	...	...	...	...	kw
889-A	Triode	16	16	16	16	16	14	11	8	...	...	...	...	kw
892-R	Triode	18	13.5	10.5	...	...	...	...	...	...	...	...	...	kw
892	Triode	30	22.5	17	...	...	...	...	...	...	...	...	...	kw
9C25	Triode	40	40	40	40	25	25	25	...	...	...	...	...	kw
9C27	Triode	40	40	40	40	25	25	25	...	...	...	...	...	kw
5592	Triode	50	50	50	50	50	44	...	...	...	...	...	...	kw
9C22	Triode	100	91	80	70	...	...	...	...	...	...	...	...	kw
9C21	Triode	150	150	150	105	...	...	...	...	...	...	...	...	kw

\*Twin type. Input values per tube for push-pull operation.

\*\*ICAS rating. This type is recommended only for applications of a high intermittent nature.



Designed for



Application



### Nos. 10035 and 10039 Multi-Scale Dials

A pair of truly "Designed for Application" controls. Large panel style dial has 12 to 1 ratio; size, 8 1/2" x 6 1/2". Small No. 10039 has 6 to 1 ratio; size, 4" x 3 1/2". Both are of compact mechanical design, easy to mount and have totally self-contained mechanism, thus eliminating back of panel interference. Provision for mounting and marking auxiliary controls, such as switches, potentiometers, etc., provided on the No. 10035. Standard finish, either silver, flat black or metal.

**JAMES MILLEN  
MFG. CO., INC.**

MAIN OFFICE AND FACTORY  
**MALDEN  
MASSACHUSETTS**



## H-F Broadcast Transmitter

(Continued from page 13)

capacitor rod. Here, too, we used the silver spring contact assembly to carry the tank current around the moving parts.

Figures 3 and 4 which show the assembly ready for packing do not show the actual relation between capacitance and inductance. In actual operation the capacitor is closed when the spider is at the bottom of the coil and does not short any portion of it. When the spider is all the way up, shorting ten turns of the coil, the capacitor is completely unmeshed.

### Test Results

By providing alternate paths for current around the moving parts of the assembly, overall efficiencies of about 70% were obtained during tests. After operation for several hours, it was possible to turn the transmitter off and touch any part of the circuit. The temperature rise over the ambient in this portion of the amplifier was 5° C.

Tuning tests also proved that rigid support of the coils and their low temperature prevented detuning after hours of continuous operation.

## TV Lenses

(Continued from page 16)

calculated for the center of the photocathode; i.e.,  $\theta = 0^\circ$ .

(B) *Angle of View*: The angle of view at infinity focus will be solely a function of focal length, for a given width of mosaic. Thus for the 2P23 the angular field of view we have the plot of Figure 2. The width of mosaic assumed is 1.28", height .96" to give a maximum diagonal of 1.6". For convenience, the angular field of view  $\phi_h$  and  $\phi_v$  are given for horizontal and vertical fields, respectively.

(C) *Racking Distance*: To aid in camera design the mechanical movement of the lens must be known. From equation (18) it can be seen that for an object at infinity,  $n$  is infinite and the racking distance  $R$  is zero. As the object comes closer,  $n$  decreases and  $R$  increases; thus for fixed mosaic position the lens travels towards the object as the object approaches from infinity. In Figure 3 the variation of  $R$  as a function of  $n$  is given.

If it is not required to have the object closer than 10F, then the lens need never be racked more than 1F.

(D) *Depth of Field*: Depth of field is a figure which cannot be readily graphed for the 2P23 as a particular case, because of the large number of

(Continued on page 29)

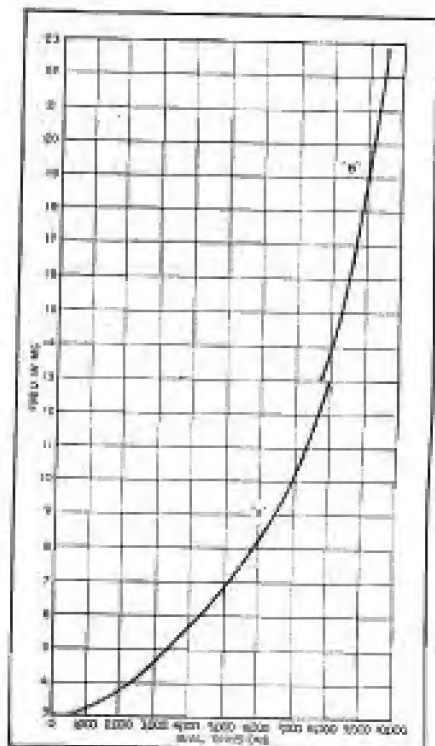


Figure 10

Tuning chart of the plate circuit. With coil-switch C out, curve d prevails, and with the coil switch in, we have curve B. This coil switch is composed of two shorting bars mounted on glass bonded mica supports. Its purpose is to short circuit three turns in the plate tuning coil and one turn in the output coupling coil.

ANOTHER *New* BROWNING DEVICE

## FREQUENCY METER

### MODEL S-4

Hand-calibrated for up to five frequencies in 1.5 to 70 MC range. Accuracy  $\pm .0025\%$  of specified frequency. AM or FM.

Frequency meters, WWV standard frequency calibrator Oscilloscope, Power supply and square wave modulator Capacitance Relay, FM-AM Tuners, FM Tuner.

WRITE TO  
DEPT. A  
FOR  
CATALOG

KNOW THE ENTIRE  
BROWNING LINE  
ENGINEERED for ENGINEERS



**BROWNING** LABORATORIES, INC.  
WINCHESTER, MASS.



parameters involved. Analysis of a typical case follows, using the graph of  $H$  versus  $d$ , as shown in Figure 4.

#### Typical Example

Analyzing a typical case, we will use a lens with an

$$F = 6''$$

$$f_{\text{min}} = 2.7$$

From the basic design and 2F23 data the following results can be obtained:

- From Figure 1 we find that this lens will provide satisfactory operation (i.e.,  $E_p = 0.1 \text{ l/ft}^2$ ) for values of scene luminosity from about 3 lumens per foot<sup>2</sup> at  $f/2.7$  to about 1,000 lumens per foot<sup>2</sup> at  $f/39$ . This easily covers the range of outdoor illumination levels for ordinary use.
- From Figure 2 we find that a field of view of  $9^\circ$  vertical by  $12^\circ$  horizontal will be obtained.
- From Figure 3 we see that a racking distance of  $.6''$  will be required to cover object distances from infinity to  $5'$ . If we are permitted a total of lens movement of  $1''$ , a near distance of  $3.2'$  can be tolerated. At  $3'$  the horizontal field (corresponding to  $12^\circ$ ) is only  $10.5'$ .
- To use Figure 4 we must calculate  $d$ , based upon the  $f/\text{number}$ . Using equation (2)

$f/\text{number}$	$d$	$H$
2.7	2.22"	280'
10	0.6"	70'

The value of  $H$  corresponding to  $d$  above can be found from Figure 4, and the angle of view of  $12^\circ$ . The depth of field for these two aperture settings can then be tabulated for specific object distances:

$S = \text{Obj. distance}$	$P_n$	$P_s$
$f/2.7 \dots \dots \left\{ \begin{array}{l} \infty \\ 100' \\ 50' \\ 10' \end{array} \right.$	$\left\{ \begin{array}{l} 140' \\ 74' \\ 42.5' \\ 9.65' \end{array} \right.$	$\left\{ \begin{array}{l} \infty \\ 156' \\ 61' \\ 10.4' \end{array} \right.$
$f/10 \dots \dots \left\{ \begin{array}{l} \infty \\ 100' \\ 50' \\ 10' \end{array} \right.$	$\left\{ \begin{array}{l} 35' \\ 35' \\ 29.2' \\ 8.75' \end{array} \right.$	$\left\{ \begin{array}{l} \infty \\ \infty \\ 173' \\ 11.7' \end{array} \right.$

If the object distance exceeds the hyperfocal distance, then the camera may be focused for the hyperfocal distance with acceptable results; any other focus distance between  $H$  and infinity will result in no improvement in focus inasmuch as the resultant circle of confusion will always be within the allowable limit.

#### References

- Devore and Lums, *Some Factors Affecting Choice of Lenses for Television Cameras*, Proc. of IRE, August, 1940.
- Hardy & Perrin, *The Prin. of Optics*, McGraw-Hill.
- Henney & Dudley, *Handbook of Photography*.
- "I" Moon, *Scientific Basis of Illuminating Engineering*, McGraw-Hill.

DESIGNED TO MEET EVERY REQUIREMENT

## The Complete Quality-Engineered LINE OF FM & TV ANTENNAS (44 to 216 MC) by

MASS PRODUCERS OF ANTENNAS  
SINCE THE START OF BROADCASTING

**BRACH**  
857-1906

Be assured of maximum reception and trouble-free operation with Brach FM & TV antennas. They are recommended for their simplicity, ease of installation and durability by service-men, installation engineers and dealers. Brach features a complete line, engineered for maximum performance and to meet all individual problems and requirements.

All antenna kits are complete, containing a five foot steel mast, non-corrosive aluminum elements, ample down-lead, all necessary hardware and the Brach Universal Base Mount which permits a  $360^\circ$  rotation of the mast to any position on any type of building after the mount has been secured. Guy wires are also included and give complete protection and stability to the installation.

Brach antennas feature a low standing wave ratio for peak reception and can be obtained to cover all channels from 44 to 216 MC. Each type of antenna has been tested to give a uniform pattern over the frequency range specified.

#### ATTENTION, USERS OF PRIVATE BRANDS

L. S. Brach Mfg. Corp., experienced in the development and manufacture of all types of receiving antennas, offers engineering and mass production facilities for the design and production of antennas to individual specifications.

#### SEND FOR CATALOG SHEETS



BRACH MULTI-BAND  
FOR FM & TV 2244  
44-108 MC 174-216 MC  
(Accessory Reflector Kit  
2244-B or Illustrated)



BRACH BROAD-BAND  
FOR FM & TV 2238  
44-108 MC  
174-216 MC



BRACH CROSS-BEAM  
FOR FM 2246  
88-108 MC



BRACH  
UNIVERSAL  
BASE MOUNT



BRACH STRAIGHT DIPOLE  
FOR FM 2234 88-108 MC  
FOR TV 2235 44-68 MC  
(Accessory Reflector Kit—  
For FM 2234-B  
Accessory Reflector Kit—  
For TV 2235-B)



BRACH STRAIGHT DIPOLE  
SHOWN WITH REFLECTOR



BRACH FOLDED DIPOLE  
FOR FM 2233 88-108 MC  
FOR TV 2237 44-68 MC  
(Accessory Reflector Kit—  
For FM 2233-B  
Accessory Reflector Kit—  
For TV 2237-B)

**L. S. BRACH MFG. CORP.**

200 CENTRAL AVE., NEWARK 4, N. J.

WORLD'S OLDEST AND LARGEST MANUFACTURERS OF RADIO ANTENNAS AND ACCESSORIES





## ALLIED "PO" RELAY

*A Medium Power Relay*

Here's the latest addition to the complete Allied line of versatile power relays. Designed by relay experts and carefully manufactured by experienced craftsmen, it surpasses the strict performance standards set for the "DO" which it replaces.

Accurately machined, iron-to-iron hinge pieces to frame mean lower magnetic loss. Machine-ground pole-piece provides perfect armature seating.

### Other features:

- Contact rating (non-inductive) 15 amperes at 24 volts D.C. or 110 volts A.C.
- Operating coil voltages up to 220 volts A.C. and 120 volts D.C.
- Available in contact arrangements of 3, and 4 poles—either normally open, normally closed or double throw.

The Allied "PO" Relay has been designed with Underwriters' Specifications in mind and engineered for greater "relay-ability". Write for complete information on this and other standard relays. We also invite inquiries on any relay problems you may have.

### DIMENSIONS

Three Pole  
Height—2 3/8"  
Length—1 13/16"  
Width—1 1/2"

Four Pole  
Height—2 3/8"  
Length—1 13/16"  
Width—2 1/16"



## ALLIED CONTROL COMPANY, Inc.

2 EAST END AVENUE • NEW YORK 21, N. Y.

## AMPERITE MICROPHONES

The ultimate in microphone quality, the new *Amperite Velocity* has proven in actual practice to give the highest type of reproduction in Broadcasting, Recording, and Public Address.

The major disadvantage of pre-war velocities has been eliminated—namely "boominess" on close talking.

- Shout right into the new *Amperite Velocity*—or stand 3 feet away—the quality of reproduction is always excellent.
- Harmonic distortion is less than 3%. (Note: best studio diaphragm mikes is 500% higher.)



P.S. Dynamic Models P.D.H., P.D.L. List \$33.50

- Practically no angle discrimination . . . 120° front and back. (Best studio diaphragm microphones . . . discrimination 800% higher.)
- One *Amperite Velocity* Microphone will pick up an entire symphony orchestra.

**STUDIO VELOCITY**, finest in quality; ideal for Broadcasting and Recording. Models R30H-R30L. List \$30.50

There is an *Amperite Microphone* for every requirement.

WRITE FOR ILLUSTRATED 4-PAGE FOLDER giving full information and prices.

**AMPERITE Company**  
561 BROADWAY NEW YORK



### Amperite

Velocity Microphones for Public Address Models R30H, R30L List \$32.50



"Kostak" Mikes Model R3H, List \$12.50 Model R3L, List \$10.50

In Canada: Atlas Radio Corp. 560 King St. W. Toronto, Ont.

## Cathode-Follower

(Continued from page 25)

ment so that a balanced dipole could be used to feed a balanced transmission line. This dipole was used with a balanced three-wire 240-ohm transmission line. Filament voltage for the two tubes was fed up the two outer wires through r-f chokes and the plate voltage was fed up the center wire. Two 300-ohm resistors, in the plate circuits of the two tubes, were used to decrease the effect of the plate-cathode capacitances of the tubes. Without these resistors the series combination of the plate-cathode capacitances would shunt the transmission line and keep the line from being terminated properly. The effect of these resistances on the effective mutual conductance of the tubes was negligible, as they had the effect of increasing the tube-plate resistances by very small percentages. The standing-wave ratio on the transmission line steadily increased from 1.1:1 at 40 mc to 1.7:1 at 220 mc. Figure 7 shows a curve of the gain of this dipole over a 290-ohm folded dipole cut for each frequency measured.

### Twelve Element Array

Figure 6 shows a view of a 12-element array of the dipoles just described. This array occupied a space of 8' x 8' x 20'.

The dipoles were divided into four groups of three each, with the dipoles of each group connected in parallel at the junctions of their transmission lines to 75-ohm transmission lines. These four 75-ohm transmission lines were connected in series to the junction of the main 300-ohm transmission line to the receiver. The gain and standing-wave ratio on the 300-ohm transmission line for the twelve-dipole array also appears in Figure 7. It can be seen that there is very little gain in the 120-mc region. This is probably due to two factors; one, the individual dipoles had very low gain at this frequency, and two, the input admittances of the cathode-followers began to be appreciable at these frequencies causing dipole loading with the result that the mutual impedances between dipoles began to throw off the phases of the various dipole signals. This second effect probably accounts for the fact that the gain in the high television band was not as high as might have been expected from the gains of the individual dipoles.

### Noise

The introduction of vacuum tubes into the antenna introduces a source of noise not present in antennas made up entirely of passive elements. Let us assume an antenna of 72-ohms radiation resistance, of negligible loss resistance, and of narrow beam-width, made up entirely of passive elements. If this antenna were pointed toward the sky in a direction from which little celestial radiation emanated, very little noise voltage would appear at the terminals of the 72-ohm antenna. It would thus appear to be a 72-ohm resistor at an extremely low temperature, so far as thermal noise was concerned. On the other hand, if the hypothetical antenna were pointed at the side of a mountain, the soil of which had a resistance of 377 ohms per square, an amount of the thermal noise being radiated by the mountain would be received by the antenna. Accordingly the noise voltage available



at the terminals of the antenna would then indicate that the antenna was a 72-ohm resistance at the temperature of the mountain.

In addition to the above type of noise, the cathode-follower antenna has the noise generated in the tubes themselves. It can be shown that this tube noise decreases relative to the signal, so that the signal-to-noise ratio increases as the number of cathode-follower antennas in the array is increased, provided the array is of the type in which the signal energies are all fed together in phase at the various transmission-line junctions.

In Figure 8 a transmission-line network connecting 27 dipoles of an array to the main receiver transmission line is shown. In the figure the lines directly from the dipoles are shown divided into nine groups of three lines each, with these nine groups further divided into three subgroups of three each. Obviously the division could have been made in many other manners. In any network, such as shown in the figure, where  $n$  is the number of lines converging at any one junction into a single line, and where  $k$  is the number of junctions through which energy must pass on, going from a dipole to the receiver, the total number of dipoles in the array will be  $n^k = m$ . Since noise energy, which is random in phase and frequency, upon reaching any junction not only goes down the main feeder into which the various lines connect, but also goes back up some of the other lines, only a part of the noise energy originating in a dipole reaches the receiver. This is not true of a received signal, since signals from the various dipoles are connected together in phase at the various junctions and the total signal energy reaching the receiver is the sum of the signal energies from the various dipoles. In addition to this difference between signal and noise energies there is another effect that increases the signal-to-noise ratio. The noise energy coming down a dipole feed line to a junction finds that the junction does not match the dipole feed line, while there appears to be a match so far as the signal is concerned. This is true because there are identical in-phase signals coming down the other transmission lines feeding into the junction which effectively modify the mismatch that would otherwise exist and does exist for the random noise signal.

As an example of the above, let us consider the case of  $n$  lines of impedance  $R/n$  feeding into a main transmission line of impedance,  $R$ , with a series connection. Looking from the main transmission line into the junction there appears to be a match. Looking from any one of the  $n$  dipole feed lines into the junction there appears to be a mismatch. The impedance seen from any feed line is  $(n-1)R/n + R$ . The standing-wave ratio on the feed line due to this mismatch would

$$\text{then be } \frac{(n-1)R/n + R}{R/n} = 2n-1.$$

The transmission coefficient corresponding to this mismatch is

$$\frac{4SWR}{(SWR+1)^2} = \frac{2n-1}{n^2} \quad (1)$$

for noise.

For unit noise energy actually being transmitted into the junction from a feed line, the energy going down the main line to the receiver is the ratio of the main

(Continued on page 32)

# EVERYBODY HAPPY?



We are . . . . because  
**NOW** we can deliver  
your **COILS**

It's lots more satisfactory to be able to say to you: "Sure we can wind those coils for you and deliver them promptly." — than to say: "Sorry — we can't get the wire."

Send Us Your Specifications For

BOBBINS • PAPER INTERLEAVE • ACETATE INTERLEAVE  
COTTON INTERWEAVE • TAPED FORM WOUND  
UNIVERSAL SINGLE OR MULTI-PIE CROSS WOUND

Send us your specifications  
and we shall be glad to quote.



**COTO-COIL CO., INC.**

COIL SPECIALISTS SINCE 1917

65 Pavilion Ave., Providence 5, R. I.

West Coast Address: P. O. Box 674, Belmont, Calif.






# STANDARDIZED READY-TO-USE METAL EQUIPMENT

ADAPTABLE FOR EVERY REQUIREMENT

Par-Metal Equipment offers many features, including functional streamlined design, rugged construction, beautiful finish . . . plus ADAPTABILITY. Eliminate need for special made-to-order units on many jobs.

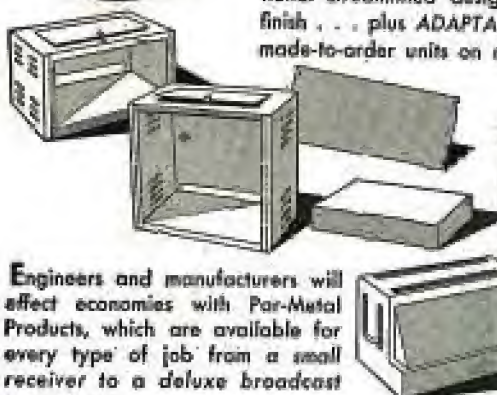

Engineers and manufacturers will effect economies with Par-Metal Products, which are available for every type of job from a small receiver to a deluxe broadcast transmitter.

Professional techniques and years of specialization are reflected in the high quality of Par-Metal. . .

**CABINETS • CHASSIS  
PANELS • RACKS**

*Write for Catalog*



(Continued from page 31)

line resistance to the total resistance seen by the feed line or

$$R = \frac{n}{(n-1)R/n + R} = \frac{n}{2n-1} \quad (2)$$

For unit noise energy leaving a dipole the amount of energy going down the main line at the first junction is then the product of (1) and (2), or  $1/n$ . The total noise energy from  $n$  dipoles is then  $n$  times this or unity. The above process repeats itself for each of the  $k$  junctions, so that the total noise energy reaching the receiver is for unit noise energy from each dipole,  $1^n = 1$ . Since the signal energies reach each junction in phase for unit signal energy, from each of the  $n^k = n$  dipoles in the whole array, the total signal energy reaching the receiver will simply be  $n$ . The signal-to-noise ratio for the antenna is then

$$SNR = 10 \log_{10} n \text{ db} \quad (3)$$

over what it would be with a single dipole so far as tube noise is concerned. Since  $k$  does not appear in the final expression it does not matter in what manner the  $n$  dipoles are interconnected, so long as the signal energies converging at any junction be equal and in phase, and so long as the dipole feed transmission line impedances be equal and of such values that a match is seen when looking from the main line back up into the particular junction.

Of course, noise reduction due to the antenna not receiving from directions of high-noise intensity will be the same for the array of cathode-follower dipoles as for any other array of the same reception pattern. Improvement in signal-noise ratio, due to the signal from a high gain cathode-follower array overriding noise generated in the receiver, will also be the same as for any other type of array of equal gain.

## Conclusions

The cathode-follower antenna system for receiving shows enough promise, so that further development might make it into a useful antenna for use over wide-frequency ranges. Of course it will only be usable for receiving since the tubes will not pass power in both directions. The big drawback with both the dipole and the c-f array is that the gain is not what might be desired. The low gain of the dipole comes from two sources. One is that the tube mutual conductance should be as large as the transmission line admittance, if a considerable voltage loss in the cathode-follower is to be avoided by the elimination of a cathode resistor for impedance matching, and the other is that specially in the high television band, transit time effects and interelectrode capacitance cause dipole loading, so that the dipole open-circuit voltage is not applied to the cathode-follower input. This tube loading causes the mutual impedances between dipoles in an array of cathode-follower dipoles to adversely effect the array operation over a band of frequencies. The desirable tube for this application is the same tube that is desired for many r-f applications, namely a tube of high mutual conductance and low interelectrode capacitances and low input conductance. Probably improved cathode-follower antennas could be built with the use of lighthouse tubes. The antenna will always have the disadvantage of requiring power from some source to operate its tubes.

AN  
IMPORTANT  
TECH LAB  
DEVELOPMENT

## New Type 1250 R. F. SWITCH

High r. f. current carrying capacity  
50 amps. max. intermittent load; 30  
amps. steady load. Low loss factor.  
Sturdy mechanical design . . .  
Mycelox insulation.  
Furnished in any  
number of  
decks.



Write for Bulletin No. 472



Manufacturers of Precision Electrical Resistance Instruments

335 CENTRAL AVE. • JERSEY CITY, N. J.




# 2-inch wattmeter....

(Electrodynamometer Type)

Another  
Simpson  
First....

...for discriminating users  
of fine panel instruments

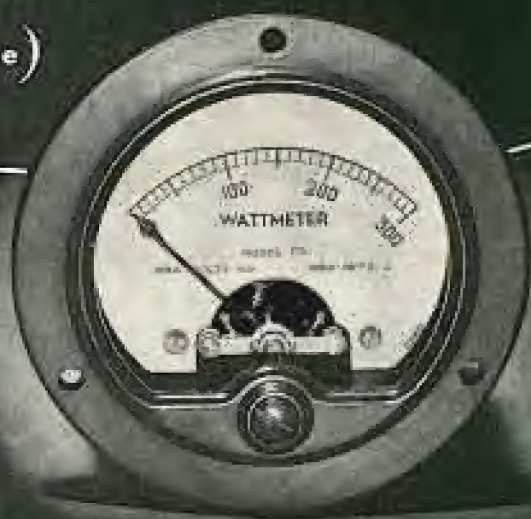

(ACTUAL SIZE)

Also available in various sizes  
and case styles. For complete in-  
formation write for bulletin.



**Simpson**  
INSTRUMENTS THAT STAY ACCURATE

ELECTRIC COMPANY 5200-5210 West Kinzie Street, Chicago 44, Illinois


In Canada: Bosh-Simpson Ltd., London, Ont.

## The Industry Offers

### DESIGNERS FOR INDUSTRY COAXIAL SWITCHES

Coaxial switches which are said to feature low standing-wave ratio and high adjacent-channel rejection ratio have been announced by Designers For Industry, Inc., 2915 Detroit Avenue, Cleveland 14, Ohio.

Three types are available: Type C, power less than 1251 to 5,000 mw, less than 1.8:1 to 20,000 mc, single circuit, two position (spot) for use with RG-8/U cable; type D, automatic—switch related to positive position by remote selector, single circuit, six position, for use with RG-8/U cable; and type V, for applications where power handling is a factor, single circuit, two position, for use with RG 17/U cable.

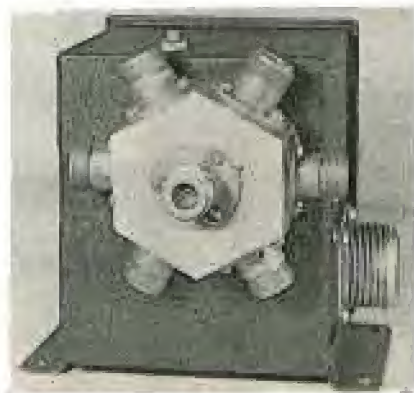

### CINEMA ENGINEERING PROGRAM EQUALIZER

A program equalizer, type 4001-B, featuring 12 db equalization at 800 cycles and 1, 5 and 10 kc in calibrated and detented two db steps has been announced by the Cinema Engineering Co., 1910 West Verdugo Ave., Burbank, Calif.

High and low frequency attenuation up to 16 db in two db steps is accomplished by turning the same controls in a counter clockwise rotation past the center point.

A constant K circuit is said to maintain the level and eliminate wave distortion over the entire range.

Equalizer is said to provide over 1465 stereo combinations.



### AIRBORNE INSTRUMENTS POLAR RECORDER

A polar recorder, type 150, has been announced by Airborne Instruments Laboratory, Inc., Mineola, N. Y. Originally designed to plot aircraft antenna radiation patterns, the recorder charts voltage on either a linear or a logarithmic scale as radial distance against angular position.

Offers a permanent ink record (reproducible) and rapid writing speed coupled with low run overshoot. Can be provided in either portable or rackmounted form.

### BROWNING FREQUENCY METER

A frequency meter, model S-7, designed for measurements in the 72.76 and 152-162 mc band has been announced by Browning Laboratories, Inc., Winchester, Mass. Meter features accuracy, in either band, of .005%, or .0025% where minor precautions are taken.

A whip antenna mounted at the side of the cabinet furnishes coupling to the transmitter and may be telescoped to form a carrying handle.

Available in single or two specified frequencies in either or both bands.

(Continued on page 34)





# NEW! RH-7-C

## SUCCESSOR TO RH-243



An adaptation of the famous RH-7 crystal unit, RH-7-C offers such advantages as:

- Smaller Size (1" x 1/2" x 11/32" - more than 1/2 smaller than RH-243)
- Smaller Weight (Less than 1/2 the weight of RH-243)
- Improved Accuracy (can be made to  $\pm 0.005\%$  over a temperature range of  $-55^{\circ}\text{C}$  to  $+95^{\circ}\text{C}$ )
- Greater Frequency Range (3-15 mc Fundamental and 15-75 mc Harmonic Mode, compared to RH-243's 3100-10,000 kc.)
- True Harmonic Seal
- The Greater Stability of Wire Mounting
- Completely Interchangeable with RH-243



**REEVES-HOFFMAN  
CORPORATION**

SALES OFFICE: 215 EAST 91 STREET, NEW YORK 18, N. Y.  
PLANT: 321 CHERRY STREET, CARLISLE, PA.

ANOTHER *New* BROWNING DEVICE

### FM TUNER MODEL RV-10

Small, compact, easily mounted high fidelity FM tuner. Armstrong FM circuit. Range: from 88 to 108 MC.

Frequency meters. WWV standard frequency calibrator. Oscilloscope. Power supply and square wave modulator. Capacitance Relay. FM-AM Tuners. FM Tuner.

WRITE TO  
DEPT. A  
FOR  
CATALOG

KNOW THE ENTIRE  
BROWNING LINE  
ENGINEERED for ENGINEERS




**BROWNING** LABORATORIES, INC.  
WINCHESTER, MASS.

### FOR PUBLIC ADDRESS, RADIO, and kindred fields, **JONES 400 SERIES PLUGS & SOCKETS**

of proven quality!



9-404-CCT



5-406-AB

Socket contacts phosphor bronze cadmium plated. Plug contacts hard brass cadmium plated. Insulation molded bakelite. Plugs and sockets polarized. 2, 4, 6, 8, 10, 12 contacts. Steel caps with baked black crackle enamel. Catalog No. 76 gives full information on complete line of Jones Electrical Connecting Devices — Plugs, Sockets and Terminal Strips. Write

**HOWARD B. JONES DIVISION**

2400 W. 25TH ST. CHICAGO 18, ILL.

## The Industry Offers


(Continued from page 33)

### G-R F-M MONITOR

An f-m monitor type 1170-A, which provides a continuous indication of center frequency, modulation, indication of percentage modulation, positive, negative, or peak-to-peak, and a lamp indication of peaks in excess of a predetermined percentage, has been announced by General Radio Company, 275 Massachusetts Avenue, Cambridge 39, Mass.

Stability of center-frequency indication is comparable with that obtained on a m monitor in the standard broadcast band, so that no calibration checks need be made during the operating day, hence a remote indicator can be used at the transmitter engineer's desk.

The monitor uses a counter spot discriminator which permits the use of a low intermediate frequency. Two audio output systems are provided, one for measuring distortion and noise with the type 1932-A distortion and noise meter and the other for audio monitoring. Inherent distortion is said to be less than 0.2% and distortions as low as 0.1% can be measured. Noise level is said to be at least 75 db below 100% modulation.

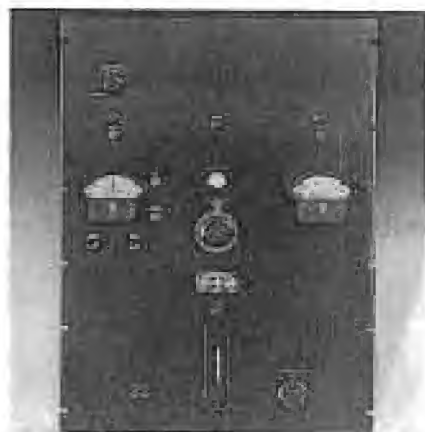

### DUMONT HI-Q CAPACITORS

A high-Q capacitor, which is said to have a leakage resistance of better than 1/4 million megohms and a power factor of .01% has been developed by Dumont Electric Corp., 34 Hubert Street, New York.

Available in capacity ranges from 5 to 100,000 mmfd in 50 to 10,000-volt ranges.

### TRIPLETT ILLUMINATED-DIAL SIGNAL GENERATOR

A signal generator, model 1432, with an illuminated dial and five fundamental ranges of 164 kc to 40 mc and two harmonic ranges directly calibrated from 36 to 120 mc, has been announced by The Triplett Electrical Instrument Co., Bluffton, Ohio.

Circuit selector provides for internally modulated signal (variable 0 to 100% at 400 cycles). Variable amplitude of external modulation 40 to 15,000 cycles; unmodulated signal or variable audio 0-10 volts at 400 cycles.

### PRD SLOTTED SECTION AND PROBE

Slotted section and probe combinations, featuring friction-driven probe carriages supported by spring-loaded ball bearings have been announced by the Polytechnic Research and Development Co., Inc., 66 Court St., Brooklyn, N. Y. Bearings roll in precision ground grooved runways made from hardened tool steel.

Slotted sections and all units of PRD spin-wave test equipment line are available in all sizes of waveguide and coaxial line in common use for frequency bands between 1000 and 40,000 mc.

### KEPCO LAB MULTIPLE POWER SUPPLY


A power supply which contains two continuously-variable B supplies delivering from 0 to 350 volts at currents up to 120 ma., one variable C supply delivering from -50 to +50 volts at 5 ma., and one heater supply for 4.2 volts at 5 amperes, has been developed by the Kepco Laboratories, Inc., 142-41 Roosevelt Avenue, Flushing, N. Y.

Two 6X5 control tubes are used in B circuit. Ripple voltage is said to be less than 5 millivolts.



# A size, type, style "Triplett-made" for every need

"Half a Century of Instrument Know-How is  
Bult Into These Fine Electrical Meters" . . .  
In sizes from 2" to 7" in a wide variety of  
case shapes and mounting arrangements.

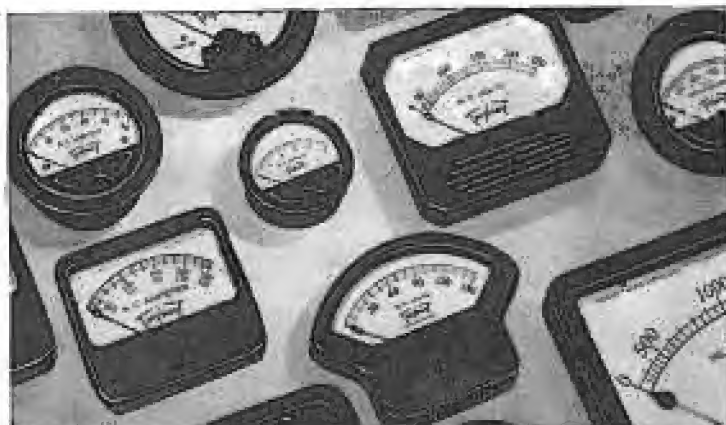

No matter how specialized your requirements may seem, the chances are that Triplett has already engineered and toolled up for a design so nearly skin that a few inexpensive changes or additions will suffice.

**Triplett . . . A Self Contained Electrical Instrument Factory . . .** From screw machine parts to plastic moldings, from moving elements to dial faces, all are fabricated in Triplett's modern air-conditioned factory. Equipped with special humidity and dust controls in assembly rooms. This self-contained factory means one overall profit markup.

Be sure your files are up-to-date with current Triplett catalog and descriptive literature. Write and specify any particular types in which interested. Address Dept. A18.

**TRIPLETT ELECTRICAL INSTRUMENT CO.—BLUFFTON, OHIO**

Representatives in Principal U. S. and Canadian Cities

Sizes 2" to 7"  
Round or Square  
A.C., D.C., R.F.,  
Rectifier or Dynamometer

Wide flange, narrow flange,  
flush, projection and portable.  
Molded and metal cases. Rear  
illumination, special dials and  
other features available on most  
models.

Precision first...to Last



## PERSONALS

J. K. Poff, has been named general sales-service engineer for manufacturers as well as jobber divisions of the Astatic Corporation, Cosmopolis, Ohio.

Allan W. Parkes, Jr. is now head of the field engineering and sales department of the Aircraft Radio Corporation, Boston, N. J.

V. W. Paken, formerly with North American Philips Co., is now handling publicity for N.Y.U. College of Engineering, 100th Street & University Avenue, New York 23, N. Y.

Neal McNaughton, former chief of the allocation section in the FCC engineering department's broadcast division, has joined the staff of NAB, as assistant director of the engineering department.

Henry L. Dahrowsky, former G.E. development engineer, has been named technical supervisor of television for WATV, Newark, N. J.

Edward M. Reeves is now technical supervisor of FM operations for WAAT-FM, Newark, N. J.

Thomas E. Howard has become chief engineer of KSD and KSD-TV, the St. Louis Post-Dispatch radio and television stations.

Howard succeeds Robert L. Cor, who has become manager of the New York Daily News television stations.

R. P. Almy has resigned as assistant general sales manager of the radio division of Sylvania Electric Products Inc. and acquired partnership in the Dial Radio Supply Company of Columbia, S. C., where he has become vice president and assistant general manager.

Melville Eastham, chief engineer, and Arthur E. Tushman, vice president of the General Radio Company, recently received certificates of commendation from the Navy Department, Bureau of Ships, for their contributions to the successful prosecution of the war.

H. Ward Zimmer, former vice president in charge of the radio tube division, Sylvania Electric Products, Inc., has been appointed vice president in charge of manufacturing operations for all company divisions.

## News Briefs

### INDUSTRY ACTIVITIES

Commercial operator license renewal applications must now be filed prior to the date of expiration. FCC states that operators should not wait until their licenses are about to expire before applying for renewal, provided service requirements are met. Applications may be filed at any time within the last year of the license term.

This procedure marks the end of the series of FCC orders which were prompted by the war emergency, and intended primarily to assist commercial operators who, because of wartime conditions, did not have actual possession of their licenses, could not ascertain their expiration dates, or for other reasons beyond their control found it difficult or impossible to file timely renewal applications.

Wire Recording Corp. of America, 131 Halsey Street, Brooklyn, N. Y., have taken over the assets and manufacturing facilities of St. George Recording Equipment Company of New York City. J. J. Sullivan is president of the newly joined corporation. Robert J. Marshall is chief engineer.

An electronic research 37-acre development, to be known as Sylvania Center, will be built at Bayside, L. I., N. Y. Ground was broken recently at the site by Walter E. Parr, chairman of the board of Sylvania Electric Products, Inc.

Activities at the center will be under the direction of Dr. Bennett S. Eliotson. The initial building, which will house physics labs, will cover over 28½ acres of the site facing Long Island Sound.

The sales operations of Fred M. Link and the manufacturing functions of Lida Radio Corporation have been combined under Link Radio Corporation, 125 W. 17 Street, N. Y. City.

### LITERATURE

The Hayden Manufacturing Co., a subsidiary of General Time Instruments Corp., East Elm Street, Torrington, Conn., has released a 16-page catalog on synchronous timing meters, clock movements and timing devices. Catalog has photos, profile drawings, shaft drawings and listings of the speeds, voltages, frequencies, shaft sizes, etc.

Catalog may be obtained by writing E. B. Hamlin.

Cornell-Dubilier Electric Corp., South Plainfield, New Jersey, have released a 24-page catalog, No. 20.

Illustrated with detail drawings as well as ballpoints of more than 30 different classes of capacitors.

Electro-Voice, Buchanan, Mich., have published a bulletin, No. 135, on the E.V. 801 contact pick-up microphone for stringed instruments.

Dayton Aircraft Products, Inc., 141 Xenia Avenue, Dayton 3, Ohio, have released an eight-page booklet on the reduction of precipitation static in aircraft radio.

Booklet details causes of precipitation static and describes the methods developed by the U. S. Air Forces during the war for greatly reducing this static. The methods now used consist of metal and ceramic antenna fittings, which in conjunction with polyethylene wire, insulate the antenna system against corona discharge. These fittings are made to be used on marker beacon, compass sense and receiving and transmitting antennas.

Ward Leonard Electric Company, Mount Vernon, N. Y., have announced publication of a catalog D-30, which describes and illustrates stock units in resistors, rheostats, and radio amateur relays.

Catalog may be procured by writing to Radio and Electronic Distributor Division, Ward Leonard Electric Company, 51 W. Jackson Blvd., Chicago 4, Illinois.

The Maltman Corp., 950 North Highland Avenue, Los Angeles 38, California, have released a four-page bulletin describing George A. Starbird microphone booms and stands, which feature air-valve control, centerless and unadorned tubings, ball bearings casters, etc.



# LEACH RELAYS

BETTER CONTROLS  
THROUGH  
BETTER RELAYS



LEACH MIDGET SERIES  
for SPACE ECONOMY in  
MODERN DESIGN

Leach Midget Relays meet today's demand for compact design—and assure positive, dependable control. The Midget Series offers a wide choice of types, each so tiny it weighs less than two ounces and all measure less than two inches.

When you hold a Leach Midget Relay, between just two fingers, you can readily see the evidence of manufacturing skill and Electrical-Engineering design that's typically Leach. Here, quality materials and careful workmanship challenge comparison. The term "Mighty Midgets" is aptly suited to Leach Midget Relays.

**LEACH RELAY CO.**

3815 AVA LON BOULEVARD, LOS ANGELES 3, CALIF.

## ZOPHAR



WAXES  
COMPOUNDS  
and  
EMULSIONS

FOR  
INSULATING and WATERPROOFING  
of ELECTRICAL and  
RADIO COMPONENTS

Also for  
CONTAINERS and PAPER  
IMPREGNATION

FUNGUS RESISTANT WAXES

ZOPHAR WAXES and COMPOUNDS

Meet all army and navy  
specifications if required

Inquiries Invited

**ZOPHAR MILLS, INC.**

FOUNDED 1846

122-26th ST., BROOKLYN, N. Y.

## COME

and hear—



over 100  
technical  
papers,  
many on  
communi-  
cations,  
radio, and  
audio  
research  
and engi-  
neering.

March 22-25, 1948, at the  
I.R.E. NATIONAL CONVENTION

and see

167 engineering exhibits  
at the  
RADIO ENGINEERING SHOW  
Grand Central Palace,  
New York City  
4-Day Registration is \$3.



The Institute of Radio  
Engineers, Inc.

1 East 7th Street  
New York 21, N. Y.

## Times-Star F-M

(Continued from page 9)

switched into the circuit for setup use whenever the gain controls are turned to the normally-off or *infinity* position. This feature saves much time in cueing records and transcriptions, especially in *tight spots* where several short *spot* announcements are run close together.

Two types of playback heads are used; one\* for the reproduction of shellac-base records, and the other\*\* for high-quality plastics. Both sets of playback arms are bridged so that switching is not necessary in change-overs; only the proper filter step need be selected.

We also use two portable program record cabinets, mounted on rubber wheels and lined with felt. Records and transcriptions are arranged according to program times by the program department and wheeled into the operator's reach. These cabinets make a very compact and time-saving arrangement for recording operations.

### The Transmitter Room

The transmitter room includes two metal spare parts storage cabinets.

Mounted on the wall between these two cabinets and away from all a-c and r-f circuits, is a power supply unit\* for the consolette. In an equipment rack are some of the audio equipment.

Here are, from top to bottom: (1) A spare vu meter and attenuator. This meter is normalised across the transmitter input but can be patched into any other circuit or used to check the levels of incoming remote programs. (2) Noise suppressor.\*\* This unit has proved very satisfactory in reducing record scratch and groove noise. A remote gate circuit control has been mounted on the consolette so that proper suppression levels may be selected instantly at the control desk for different types of records and for noisy transcriptions, or taken out entirely for voice and high-quality pressings. This control was installed in the space originally occupied by the consolette meter switch; the switch was remounted inside the consolette and is easily accessible from the top for meter readings. (3) Limiting amplifier.\*\* (4) Variable line equalizer.\*\* This equalizer is permanently connected across a remote line from the *Cincinnati Times-Star* news room and equalized to 15

\*Pickering.

\*\*RCA.

\*\*\*RCA M1-31301-B.

\*\*\*\*Technical Instrument Corp. 810-AB.

\*\*\*\*\*RCA 86-A1.



## Crystals for the Critical




### JK STABILIZED HEAT JKO-7

Designed to accommodate crystals from 80 to 3,000 kc and recommended for broadcast and frequency standard applications. Large 7-pin base. Will accommodate most JK holders besides accommodating more than one small holder. Heater 6.3 V., 118 V., others on special order. Operating temperature 80° C plus or minus 1°, others also on special order. Available as double oven on special order. Crystals electrostatically shielded. Better thermal insulation results in lower heater current consumption and shorter warm-up time. May be mounted in any position. Also available with oven control. Entire unit is ruggedly built for long, dependable service.

Write for Illustrated Folder

**The JAMES KNIGHTS CO.**  
SANDWICH, ILLINOIS

# FREE

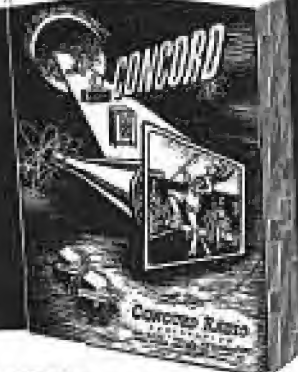

**NEW! COMPLETE!**  
**Concord**  
**Radio Catalog**  
100 Value-Packed Pages of  
the LATEST and BEST in

**RADIO • TELEVISION and  
ELECTRONIC EQUIPMENT**  
at LOWEST PRICES

Write for FREE copy. Address Dept. R-11

**CONCORD RADIO CORP.**


CHICAGO 7 191 W. Jackson Blvd.  
ATLANTA 3 165 Peachtree St.  
Remounting Chicago Branch 229 West Madison St.  
LAFAYETTE RADIO CORP.

kc. (5) Jack strip 1 which contains jacks normalised to four pre-amplifiers (contained in the console), two turnables, the noise suppressor, console output, preemphasis coil, limiting amplifier, a 20-db fixed pad, and the transmitter input. The preemphasis filter circuit is of the constant-impedance, balanced, bridge-T type and is designed for preemphasis attenuation of audio frequencies. A 5-db minimum loss is attained at 15 kc, with an approximate 26-db maximum loss below 500 cps. The frequency response gives a maximum equalization of approximately 20 db between the high and low frequencies. (6) Jack strip 2, which is normalised to a high-fidelity line (15 kc) line from WKRC, four multiple jacks, a special news room line, and six remote positions. These positions appear at the console on positions 5 and 6. Remote programs are checked in by pressing the appropriate remote button on either mixer position and throwing the mixer key to Audition. The spare vu meter may then be patched into the circuit to determine the remote levels and to calculate the approximate amount of line equalization to be used for that particular setup. Most remote terminations have been tested and checked in prior to air time with equalization settings noted for future reference. However, many special events or one-time pickups arise during the course of air time and can be satisfactorily equalized by the above method. (7) Another jack strip which contains input, output, bridging and multiple jacks for program and monitor amplifiers and terminations for transmitter and console telephones. There are 14 spare jacks in this strip. (8) A spare variable line equalizer for use on remote lines or wherever needed. (9) Program amplifier. (10) An a-c control switch and indicator lamp. (11) Coil bank, including three 500-ohm isolation coils, one spare 20-db fixed attenuator, and a preemphasis filter and fixed attenuator.

On another rack are additional audio equipment, from top to bottom: (1) Plate current meter for program and monitor amplifiers. (2) Frequency monitor. (3) and (4) Beat-frequency oscillator and distortion and noise meter. (5) Spare program amplifier. (7) Monitor amplifier. Remote gain control for this monitor (Continued on page 39)

PRCA 10E-1A,  
PRCA BA-1B,  
PRCA M1-4026,  
RG.E, BM 1-A,  
PRCA,  
RG.B,  
PRCA BA-4C.

## MEASUREMENTS CORPORATION Model 59

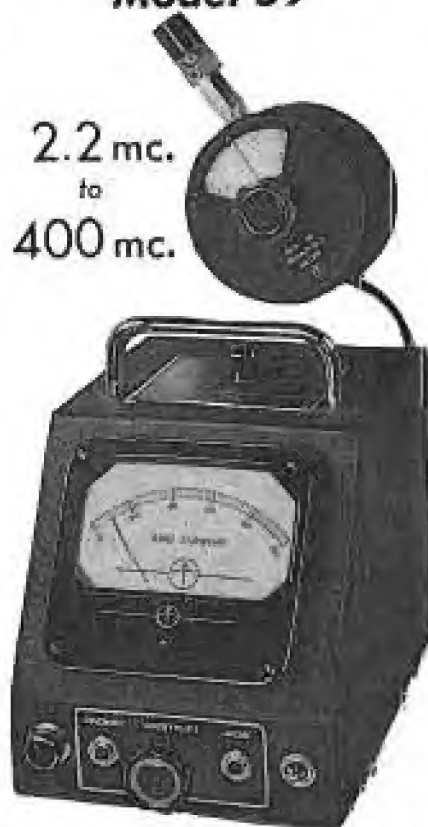

## MEGACYCLE METER

Radio's newest, multi-purpose instrument consisting of a grid-dip oscillator connected to its power supply by a flexible cord.

Check these applications:

- For determining the resonant frequency of tuned circuits, antennas, transmission lines, by-pass condensers, chokes, coils.
- For measuring capacitance, inductance, Q, mutual inductance.
- For preliminary tracking and alignment of receivers.
- As an auxiliary signal generator; modulated or unmodulated.
- For antenna tuning and transmitter neutralizing, power off.
- For locating parasitic circuits and spurious resonances.
- As a low sensitivity receiver for signal tracing.

**MANUFACTURERS OF**  
Standard Signal Generators  
Pulse Generators  
FM Signal Generators  
Square Wave Generators  
Vacuum Tube Voltmeters  
VHF Radio Noise & Field Strength Meters  
Capacity Bridges  
Megohm Meters  
Phase Sequence Indicators  
Tension and FM Test Equipment

**SPECIFICATIONS:**  
Power Unit, 5 1/2" wide;  
6 1/2" high 7 1/2" deep.  
Oscillator Unit, 3 1/2" diameter, 2" deep.  
**FREQUENCY:**  
2.2 mc. to 400 mc.; covers plug-in coils.  
**MODULATION:**  
CW or 120 cycles/sec or external.  
**POWER SUPPLY:**  
110-120 volts, 50-60 cycles; 20 watts.


**MEASUREMENTS CORPORATION**  
BOONTON NEW JERSEY



# 10-Kw A-M Installation In Puerto Rico



Above, view of WBS building in San Juan, Puerto Rico, which houses 10 kw a-m transmitter, operating on 740 kc. The building is located seven air miles from downtown San Juan. A two-tower directional antenna array is used to provide a cardioid pattern; full 10-kw power is used for day and night service. Below, Carlos Rafael Mercado, WBS engineer, inserting a rectifier tube in the main rectifier power supply of the transmitter.

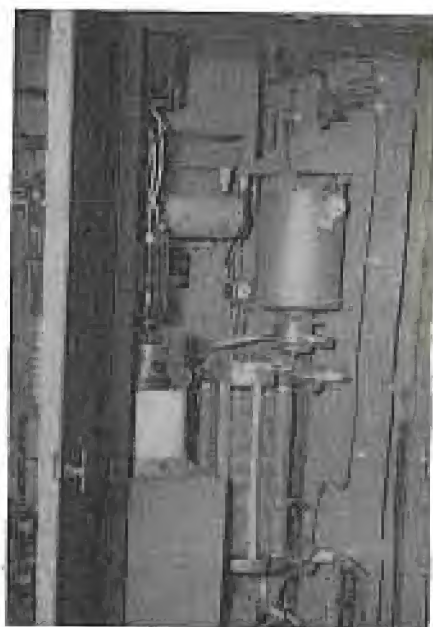


Above, close-up view of the modulator.



Westinghouse.

Below, engineer Mercado inserting a tube in the exciter section of the transmitter.

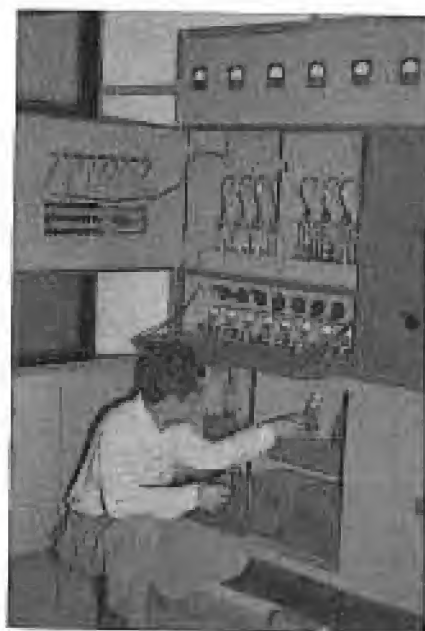

## Electronic Research & Mfg. Corp.

A Service to INDUSTRY

Development and Construction of  
Electronic Equipment for Any Application

1420 E. 25th St., Cleveland 14, O. - Ph.: SU. 1958

## WHEN YOU CHANGE YOUR ADDRESS

Be sure to notify the Subscription Department of COMMUNICATIONS, 52 Vanderbilt Avenue, New York 17, N. Y., giving the old as well as the new address, and do this at least four weeks in advance. The Post Office Department does not forward magazines unless you pay additional postage, and we cannot duplicate copies mailed to the old address. We ask your cooperation.



ANOTHER *New* BROWNING DEVICE

## FREQUENCY METER MODEL S-5

Accurately checks frequencies in one, two or three bands, from 30 to 500 MC. Custom-built. Crystal frequency stability equips it for extended use in locations where it is inconvenient to check WWV signals. Accuracy .0025%.

Frequency meters. WWV standard frequency calibrator. Oscilloscope. Power supply and square wave modulator. Capacitance Relay. FM-AM Tuners. FM Tuner.

WRITE TO  
DEPT. A  
FOR  
CATALOG

KNOW THE ENTIRE  
BROWNING LINE  
ENGINEERED for ENGINEERS



**BROWNING** LABORATORIES, INC.  
WINCHESTER, MASS.

## Times-Star F-M

(Continued from page 37)

is located on the extreme lower left-hand corner of the console, in the space originally used for the monitor phone jack. (8) An a-c control switch and indicator lamp. This switch con-

trols a-c power to all equipment in this rack except the crystal heater circuit in the frequency monitor. A special power supply<sup>2</sup> is available for this monitor. A special a-c line is connected from the power circuit to the transmitter crystal heater supply source so that all heaters are always on. Space is also provided on this rack for installation of a transmission-line monitor.<sup>3</sup>

All equipment is readily accessible for servicing. As an aid to locating potential sources of trouble, a 50-watt 115-volt lamp bulb has been mounted in the back of each transmitter unit so that all parts are fully illuminated. Heat from the bulbs is not sufficient to affect inside temperatures. A thermometer has been placed inside each unit so that constant watch may be maintained over each stage. Often a small rise in temperature, accompanied by a change or fluctuation in plate or grid current, is sufficient warning of impending trouble, which may then be corrected before it actually happens. Fans have been installed in the top of each audio rack so that air circulation will be improved.

One of our most useful maintenance aids is a portable test equipment dolly, in which are a tube tester, vacuum-tube voltmeter, scope, tools and supplies, etc.

A large section of the wall behind the transmitter units is covered with a framed blueprint of the complete transmitter and control circuits. This diagram is large enough to read across the room and has been a valuable asset in maintenance and trouble-shooting.

For network operation we plan to install soon a special relay receiver.

<sup>1</sup>D.G.E. 45P2A1.  
<sup>2</sup>RCA ML28155

## SEVEN-TOWER DIRECTIONAL ARRAY



Seven tower directional-array system of WREX, Duluth, Minnesota. Six towers are used during the night, and the seventh tower with two night-pattern towers make up a three-element array for daytime coverage. (Courtesy Blue-Box)



## RCA STANDARDIZES ON "XL" PLUGS

... for popular microphone models such as the "Announcer" (Type KN-1A) (shown above), Junior Velocity (MI-4036), Aeropressure (MI-6026, MI-6027), Program Velocity (MI-12002, MI-12003), Aerodynamic (MI-6226, MI-6228), because Cannon XL's are quality plugs, yet in the moderate price class and available everywhere.



The RCA Junior Velocity Microphone, a low cost, lightweight model is equipped with XL-3-12 for speedy interchange of cable.

RCA is a big user not only in the XL but also the Cannon "P", "DP", "K" and "AN" series in many types of equipment. Cannon's reputation for quality



XL-3-12 PLUG  
LIST \$1.20

XL-3-11 PLUG  
LIST \$1.25

and dependability is assured in RCA equipment fitted with Cannon Plugs.

Write for FREE new A-121  
BULLETIN and list of 200  
Cannon Electric Distributors.

SINCE 1915

**CANNON**  
**ELECTRIC**

*Development Company*

3209 HUMBOLDT ST., LOS ANGELES 21, CALIF.  
IN CANADA & BRITISH EMPIRE:  
CANNON ELECTRIC CO., LTD., TORONTO 13, ONT.  
WORLD EXPORT (excepting British Empire):  
FRAZER & HANSEN, 301 CLAY STREET  
SAN FRANCISCO 11, CALIFORNIA  
REPRESENTATIVES IN PRINCIPAL CITIES



## Simple New *Solderless* Couplings

Maintain Constant 51.5 Ohm Impedance



### ANDREW *Flanged* COAXIAL TRANSMISSION LINE FOR FM-TV

Offering the dual advantage of easy, solderless assembly and a constant impedance of 51.5 ohms, this new ANDREW FM-TV line is available in four diameters. Each line fully meets official RMA standards. It also is recommended for AM installations of 5 Kw or over.


Manufactured in twenty-foot lengths with brass connector flanges silver brazed to the ends, sections are easily bolted together. A circular synthetic rubber "O" gasket effectively seals the line. Flux corrosion and pressure leaks are avoided. A bullet-shaped device positively connects inner conductors.

Close tolerances are maintained on characteristic impedance in both line and fittings, insuring an essentially "flat" transmission line system.

Mechanically and electrically better than previous types, this new line has steelite insulators of exceptionally low loss factor. Both inner and outer conductors of all four sizes are of copper having very high conductivity.

Flanged 45 and 90 degree elbow sections, and a complete line of accessories and fittings available.

Better be safe, than sorry. Avoid costly post-installation line changes. Get complete technical data, and engineering advice, from ANDREW now.

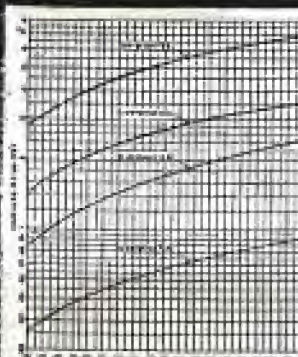

#### ATTENUATION CURVE

Shows total loss plus 10% derating factor to allow for resistance of joints and deterioration with time.  
Four diameters available: 1 1/2" — 1" — 3/4" — 1/2"

# Andrew

CORPORATION

363 EAST 75th STREET • CHICAGO 19

Pioneer Specialists in the Manufacture of a Complete Line of Antenna Equipment

## ADVERTISERS IN THIS ISSUE

### COMMUNICATIONS INDEX

JANUARY, 1948

ALLIED CONTROL CO., INC.	38
Agency: Mitten-Coffey, Inc.	
AMERICAN TELEPHONE & TELEGRAPH CO.	17
Agency: N. W. Ayer & Son, Inc.	
AMPERITE CO.	38
Agency: J. J. Gold Co.	
ANDREW CO.	40
Agency: Barton Brooks, Advertising	
BENDIX RADIO CORP.	29
Agency: MacManus, Tate & Adams, Inc.	
L. S. BRACH MFG. CORP.	21
Agency: A. W. Levin Co.	
BROWNING LABORATORIES, INC.	28, 34, 41
Agency: The Charles Brumba Co.	
E. H. BUNNELL & CO.	19
Agency: J. R. Baudie	
CANNON ELECTRIC DEVELOPMENT CO.	37
Agency: Ivers Jones Co.	
THE CLEVELAND CONTAINER CO.	1
Agency: The Korbitt Service Co.	
CONCORD RADIO CORP.	37
Agency: E. H. Brown Ad. Agency	
COB-BOIL CO., INC.	41
Agency: Frank R. Dodge & Co., Inc.	
ELECTRONIC RESEARCH & MFG. CORP.	33
FAIRCHILD CAMERA & INSTRUMENT CORP.	9
Agency: G. M. Buford Co.	
FEDERAL TELEPHONE & RADIO CORP.	Back Cover
Agency: Rickard & Co.	
GENERAL RADIO CO.	Inside Back Cover
HEWLETT-PACKARD CO.	1
Agency: J. G. Cole, Advertising	
THE INSTITUTE OF RADIO ENGINEERS	36
HOWARD S. JONES DIV. CINCH MFG. CORP.	34
Agency: Merrill-Symonds, Advertising	
THE JAMES KNIGHTS CO.	37
Agency: Dalgligh Berts, Advertising	
LEACH RELAY CO.	30
Agency: The McCarty Co.	
MEASUREMENTS CORPORATION	37
Agency: Pfeiffer & Smith	
JAMES MILLEN MFG. CO., INC.	28
PAB-METAL PRODUCTS CORP.	32
Agency: E. J. Galt Co.	
PHILO CORPORATION	1
Agency: Julian G. Pollack Co.	
REEVES-HOFFMAN CORP.	34
SIMPSON ELECTRIC CO.	33
Agency: Kretsch & Nelson, Inc.	
SORENSEN & CO., INC.	Inside Front Cover
Agency: Henry A. Stephens, Inc.	
TECH LABORATORIES, INC.	33
Agency: Lewis Ad. Agency	
TRIPLETT ELECTRICAL INSTRUMENT CO.	35
Agency: Western Ad. Agency, Inc.	
U. S. TREASURY DEPT.	4
ZOPHAR MILLS, INC.	36
Agency: Gann-Mears Ad. Agency	





**TYPE 566-A**  
0.5 — 150 Mc  
Accuracy: 2 — 3%  
\$60



**TYPE 758-A**  
55 — 400 Mc  
Accuracy:  
2%, \$35



**TYPE 1140-A**  
240 — 1200 Mc

This is the latest addition to the G-R wavemeter line, with a butterfly-type tuned circuit in which the capacitive and inductive elements are built integrally and tuning is effected by simultaneously varying both. The rectifier is a sensitive and rugged silicon crystal detector with a microammeter for resonance indication. The scale on the frequency indicator drum is 5 inches long. The tuning unit and indicating meter are mounted in a plastic housing which can be held conveniently in one hand. The instrument is accurate to 2% of the indicated frequency. Price \$70.

**TYPE 724-B** 0.016 — 50 Mc  
Accuracy: 0.25 — 1%, \$275



## WAVEMETERS for the ENTIRE COMMUNICATIONS SPECTRUM

• Simple, tuned-circuit wavemeters, either with or without resonance indicators, always will find wide application in the laboratory. Direct reading, compact, lightweight, rugged, easy to use, and with accuracy more than ample for many uses, these meters effectively supplement the highly accurate heterodyne frequency meter for many types of measurement.

Wavemeters will always be useful for approximate measurements of coil ranges, oscillator spans, preliminary lining up of transmitters, locating and naming harmonics in either the receiver or the transmitter, and for general experimental work.

For almost thirty years General Radio Company has pioneered in the design and manufacture of accurate wavemeters. General Radio's frequency measurement program, which

has resulted in the finest primary standard of frequency to be obtained anywhere, has always had as a concurrent project the development of a line of wavemeters to cover as much of the useful radio spectrum as the art required.

The four instruments depicted cover the entire frequency range from 16 kc to 1,200 Mc. All of these meters are calibrated in our Calibration Laboratory in terms of the G-R Primary Standard of Frequency. All are built to the same standard of G-R quality as is found in the most precise frequency measuring assembly we manufacture.

G-R wavemeters are correctly designed, skillfully engineered, carefully manufactured and accurately calibrated.

**Note — We have a small stock of each for prompt shipment.**

# GENERAL RADIO COMPANY

Cambridge 39,  
Massachusetts

90 West St., New York 6

920 S. Michigan Ave., Chicago 5

950 N. Highland Ave., Los Angeles 38



for

**FM**

**COVERAGE and PERFORMANCE**



## you can't beat Federal's COMPLETE "ONE-PACKAGE" STATION

A broadcast station that's FM by Federal all the way—from microphone to antenna—offers *three exclusive features* that assure maximum coverage at minimum operating cost, and maximum performance with minimum maintenance expense.

### 1. FEDERAL'S SQUARE-LOOP ANTENNA!

The coverage of an FM station depends primarily on the effective strength of the radiated signal. And Federal's 8-Element, Square-Loop Antenna gives an effective radiated power *more than 8 times* the transmitter rating. Actual installations have repeatedly *proved* its ability to give outstanding coverage—and to withstand high winds and heavy icing loads.

### 2. FEDERAL'S HIGH-FIDELITY TRANSMITTER!

All Federal FM transmitters feature the exclusive "Frequematic"™ modulator—for outstanding fidelity and performance. Maintains center-frequency stability within 0.001%—reduces signal-to-noise ratio to 5600-to-1—uses simple all-electronic circuits with standard receiver tubes—easy to align, simple to maintain.

### 3. FEDERAL ENGINEERING ALL THE WAY!

Complete FM by Federal means FM at its best, with all components precision engineered to work together. Transmitter console, studio console, transcription units, power supplies—everything from microphone to antenna—designed and coordinated for maximum over-all performance and economy.

When planning your new FM station, remember these exclusive advantages. And if you want to get on the air *fast*, Federal can now make your complete installation in record time! For further information, write to Federal, Dept. B610.

With this Federal 8-Element Square-Loop Antenna, now on the air at Station WMEC-FM, Greenville, South Carolina, listeners more than 200 miles away—including cities in 6 different states—report excellent reception. Lower photo shows WMEC's transmitter room, with Federal 10-Kw transmitter, console, monitor speaker and power supply.

\*Trade Mark



*Federal Telephone and Radio Corporation*

100 KINGSLAND ROAD, CLIFTON, NEW JERSEY

KEEPING FEDERAL YEARS AHEAD... is IT&T's world-wide research and engineering organization, of which the Federal Telecommunication Laboratories, Murray, N. J., is a unit.

In Canada:—Federal Electric Manufacturing Company, Ltd., Montreal, P. Q.  
Export Distributors:—International Standard Electric Corp., 67 Broad St., N. Y.

